

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 205 526 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
29.09.2004 Bulletin 2004/40

(51) Int Cl.7: **C09K 11/06**

(21) Application number: **01309497.4**

(22) Date of filing: **09.11.2001**

(54) **Polymeric fluorescent substance and polymer light-emitting device using the same**

**FLUORESZIERENDE POLYMER SUBSTANZ UND VERWENDUNG DERSELBEN IN
LICHT-EMITTIERENDER VORRICHTUNG**

Substance fluorescente polymérique et dispositif électroluminescent organique l'utilisant

(84) Designated Contracting States:
DE FR GB NL

(30) Priority: **10.11.2000 JP 2000343301**
26.04.2001 JP 2001129289

(43) Date of publication of application:
15.05.2002 Bulletin 2002/20

(73) Proprietor: **Sumitomo Chemical Company,
Limited**
Chuo-ku Osaka 541-8550 (JP)

(72) Inventors:
• **Doi, Shuji**
Tsukuba, Ibaraki (JP)
• **Tsubata, Yoshiaki**
Tsukuba, Ibaraki (JP)
• **Ueoka, Takahiro**
Tsukuba, Ibaraki (JP)

(74) Representative: **Cresswell, Thomas Anthony**
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5JJ (GB)

(56) References cited:
EP-A- 0 725 120 US-A- 5 807 974
US-A- 5 876 864

• **RANGER M ET AL: "NEW WELL-DEFINED
POLY(2,7-FLUORENE) DERIVATIVES:
PHOTOLUMINESCENCE AND BASE DOPING"
MACROMOLECULES, AMERICAN CHEMICAL
SOCIETY. EASTON, US, vol. 30, no. 25, 15
December 1997 (1997-12-15), pages 7686-7691,
XP000727534 ISSN: 0024-9297**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 205 526 B1

5 Field of the Invention

10 Description of Related Art

[0003] Apart from organic electroluminescence devices using mainly an organic compound having lower molecular weight, there is a polymer light emitting device (hereinafter, referred sometimes to as polymer LED) using a light emitting material having higher molecular weight (hereinafter, referred sometimes to as polymeric fluorescent substance). WO9013148, JP-A No. 3-244630, Appl. Phys. Lett., 58, p. 1982 (1991) and the like disclose polymer LEDs using a polymeric fluorescent substance, poly(p-phenylenevinylene) (hereinafter, referred to as PPV), or a derivative thereof in a light emitting layer.

[0005] As the polymeric fluorescent substance used in these polymer LEDs, polyfluorene (Jpn. J. Appl. Phys., 30, p. L1941 (1991)), poly-p-phenylene derivatives (Adv. Mater., 4, p. 36 (1992)); and the like are also reported, in addition to the above-mentioned poly(p-phenylenevinylene) and derivatives thereof.


[0007] An object of the present invention is to provide a polymeric fluorescent substance containing an arylene vinylene structure and a fluorene structure and manifesting strong fluorescence, and a polymer LED of high performance which can be driven at lower voltage with high efficiency, using this polymeric fluorescent substance.

[0008] The present inventors have intensively studied in view of such conditions, and resultantly found that a polymeric fluorescent substance manifesting fluorescence in solid state and having a polystyrene-reduced number-average molecular weight of 10^3 to 10^8 wherein the polymeric fluorescent substance contains one or more of segments represented by the following formula (1) and one or more of repeating units represented by the following formula (2) shows strong fluorescence and a polymer LED of high performance which can be driven at lower voltage with high efficiency is obtained using the above-mentioned polymeric fluorescent substance, leading to completion of the invention.

50



[wherein, Ar_1 and Ar_2 each independently represent an arylene group or a divalent heterocyclic compound group. R_2 and R_3 each independently represent a group selected from the group consisting of a hydrogen atom, alkyl groups, aryl groups, heterocyclic compound groups and cyano group. R_1 and R_4 each independently represent a group selected from the group consisting of alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, arylalkenyl groups, arylalkinyl groups, monovalent heterocyclic compound groups and cyano group. The symbols a and c each independently represent an integer of 0 to 4, and b represents an integer of 1 or more. When b is 1, a and c do not represent 0 simultaneously. When b is 2, at least one of groups R_2 and R_3 represents a group other than a hydrogen atom and cyano group. When b is 3 or more, a and c do not represent 0 simultaneously if both of R_2 and R_3 are a hydrogen atom. When a is 2 or more, a plurality of R_1 s may be the same or different. When c is 2 or more, a plurality of R_4 s may be the same or different. R_1 to R_4 may be connected to form a ring. Further, when R_1 to R_4 are a group containing an alkyl chain, one or more of a methyl group, methylene group and methine group constituting this alkyl chain may be substituted with a group containing a hetero atom],

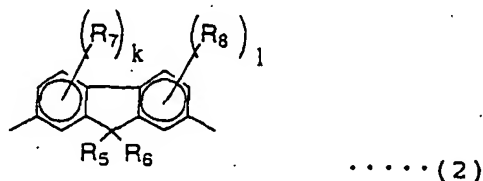

[wherein, R_5 and R_6 each independently represent a group selected from the group consisting of a hydrogen atom, alkyl groups, aryl groups and monovalent heterocyclic compound groups. R_7 and R_8 each independently represent a group selected from the group consisting of alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, monovalent heterocyclic compound groups and cyano group. The symbols k and l each independently represent an integer of 0 to 3. When k is 2 or more, a plurality of R_7 s may be the same or different. When l is 2 or more, a plurality of R_8 s may be the same or different. Two or more of R_5 to R_8 may be mutually connected to form a ring. Further, when R_5 to R_8 are a group containing an alkyl chain, this alkyl chain may be interrupted with a group containing a hetero atom.] The present invention also provides [2] A polymer light emitting device comprising at least a light emitting layer between a pair of electrodes composed of an anode and a cathode at least one of which is transparent or semi-transparent wherein the light emitting layer contains a polymeric fluorescent substance according to [1].

[0010] The present invention provides a flat light source, a segment display, and a dot matrix display all obtained by using the polymer light emitting device. The present invention also provides a liquid crystal display obtained by using the polymer light emitting device as a back-light.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0011] The polymeric fluorescent substance of the present invention is a polymeric fluorescent substance manifesting fluorescence in solid state and having a polystyrene-reduced number-average molecular weight of 10^3 to 10^8 wherein the polymeric fluorescent substance contains one or more of segments represented by the formula (1) and one or more of repeating units represented by the formula (2).

[0012] When a segment represented by the formula (1) comprises a repeating unit represented by the formula (3) or the formula (5), it is preferable that the total amount of repeating units represented by the formula (2) and the formula (3) or the formula (5) is 50 mol% or more based on the total amount of all repeating units and the total amount of repeating units represented by the formula (3) or the formula (5) is 0.1 mol% or more and 50 mol% or less based on the total amount of repeating units represented by the formula (2) and the formula (3) or the formula (5).

[0013] The repeating unit represented by the formula (1) is a segment comprising an arylenevinylene derivative group containing a substituent, and there are exemplified segments of the above-mentioned formula (3) or (5) and segments formed by connecting two or more of them. More specifically, there are exemplified stilbene groups having a substituent represented by the formula (4), distilbene groups having a substituent represented by the formula (6), and the like.

[0014] The repeating unit represented by the formula (2) is a fluorene group optionally having a substituent.

[0015] R_2 and R_3 in the formula (1) each independently represent a group selected from the group consisting of a

hydrogen atom, alkyl groups, aryl groups, monovalent heterocyclic compound groups and cyano group.

[0016] Those in which R_2 and R_3 represent a substituent other than a hydrogen atom or cyano group are described below.

[0017] The alkyl group may be any of linear, branched or cyclic, and usually has about 1 to 20 carbon atoms, and specific examples thereof include a methyl group, ethyl group, propyl group, i-propyl group, butyl group, i-butyl group, t-butyl group, pentyl group, isoamyl group, hexyl group, cyclohexyl group, heptyl group, octyl group, 2-ethylhexyl group, nonyl group, decyl group, 3,7-dimethyloctyl group, lauryl group and the like, and preferable are a pentyl group, isoamyl group, hexyl group, octyl group, 2-ethylhexyl group, decyl group and 3,7-dimethyloctyl group.

[0018] The aryl group usually has about 6 to 60 carbon atoms, and specific examples thereof include a phenyl group, C_1 to C_{12} alkoxyphenyl groups, C_1 to C_{12} alkylphenyl groups, 1-naphthyl group, 2-naphthyl group and the like, and preferable are C_1 to C_{12} alkoxyphenyl groups and C_1 to C_{12} alkylphenyl groups.

[0019] The monovalent heterocyclic compound group usually has about 4 to 60 carbon atoms, and specific examples thereof include a thienyl group, C_1 to C_{12} alkylthienyl groups, pyrrolyl group, furyl group, pyridyl group, C_1 to C_{12} alkylpyridyl groups and the like, and preferable are a thienyl group, C_1 to C_{12} alkylthienyl groups, pyridyl group and C_1 to C_{12} alkylpyridyl groups.

[0020] R_2 and R_3 in the formula (1) may be in the relation of cis or trans.

[0021] Ar_1 and Ar_2 in the repeating unit represented by the formula (1) each independently represent an arylene group or a divalent heterocyclic group.

[0022] The arylene group is an atomic group obtained by removing two hydrogen atoms from an aromatic hydrocarbon. The aromatic hydrocarbon referred to here is a hydrocarbon used as a mother body of an aromatic compound and containing a benzene ring, and includes those having a condensed ring and those containing a dependent benzene ring or condensed ring connected directly or via a group such as vinylene and the like.

[0023] The arylene group usually has 6 to 60 carbon atoms, and specific examples thereof include a phenylene group, biphenylene group, terphenylene group, naphthalenediyl group, anthracenediyl group and the like. The carbon number of the arylene group does not include the carbon number of a substituent.

[0024] The divalent heterocyclic compound group indicates a residual atomic group obtained by removing two hydrogen atoms from a heterocyclic compound. The carbon number is usually from 4 to 60, and a furandiyl group, thienylene group, fluorenediyl group, pyridinediyl group, quinolinediyl group, quinoxalinediyl group and the like are exemplified. The carbon number of the divalent heterocyclic compound group does not include the carbon number of a substituent.

[0025] Here, examples of the heterocyclic compound includes those organic compounds having a cyclic structure in which elements constituting the ring include not only a carbon atom but also a hetero atom such as oxygen, sulfur, nitrogen, phosphorus, boron and the like.

[0026] In the formula, a and c each independently represent an integer of 0 to 4, and b represents an integer of 1 or more. When b is 1, a and c do not represent 0 simultaneously. When b is 2, at least one of groups R_2 and R_3 represents a group other than a hydrogen atom and cyano group. When b is 3 or more, a and c do not represent 0 simultaneously if both of R_2 and R_3 are a hydrogen atom. When a is 2 or more, a plurality of R_1 s may be the same or different. When c is 2 or more, a plurality of R_4 s may be the same or different. R_1 to R_4 may be connected to form a ring. Further, when R_1 to R_4 are a group containing an alkyl chain, one or more of a methyl group, methylene group and methine group constituting this alkyl chain may be substituted with a group containing a hetero atom.

[0027] The repeating unit represented by the formula (2) is a fluorene group optionally having a substituent.

[0028] R_5 and R_6 in the formula (2) each independently represent a group selected from the group consisting of a hydrogen atom, alkyl groups, aryl groups and monovalent heterocyclic compound groups. When R_5 and R_6 represent a substituent other than a hydrogen atom, examples thereof are the same as exemplified for R_1 .

[0029] In the repeating unit represented by the formula (2), k and l each independently represent an integer of 0 to 3. When k is 2 or more, a plurality of R_7 s may be the same or different. When l is 2 or more, a plurality of R_8 s may be the same or different. Two or more of R_5 to R_8 may be mutually connected to form a ring. Further, when R_5 to R_8 are a group containing an alkyl chain, this alkyl chain may be interrupted with a group containing a hetero atom.

[0030] R_1 and R_4 in the formula (1) and R_7 and R_8 in repeating units represented by the formula (2) each independently represent a group selected from the group consisting of alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, arylalkenyl groups, arylalkinyl groups, monovalent heterocyclic compound groups and cyano group.

[0031] Those in which R_7 and R_8 represent a substituent other than cyano group are described below.

[0032] The alkyl group may be any of linear, branched or cyclic, and usually has about 1 to 20 carbon atoms, and specific examples thereof include a methyl group, ethyl group, propyl group, i-propyl group, butyl group, i-butyl group, t-butyl group, pentyl group, isoamyl group, hexyl group, cyclohexyl group, heptyl group, octyl group, 2-ethylhexyl group, nonyl group, decyl group, 3,7-dimethyloctyl group, lauryl group and the like, and preferable are a pentyl group, isoamyl

group, hexyl group, octyl group, 2-ethylhexyl group, decyl group and 3,7-dimethyloctyl group.

[0033] The alkoxy group may be any of linear, branched or cyclic, and usually has about 1 to 20 carbon atoms, and specific examples thereof include a methoxy group, ethoxy group, propyloxy group, i-propyloxy group, butoxy group, i-butoxy group, t-butoxy group, pentyloxy group, isoamyloxy group, hexyloxy group, cyclohexyloxy group, heptyloxy group, octyloxy group, 2-ethylhexyloxy group, nonyloxy group, decyloxy group, 3,7-dimethyloctyloxy group, lauryloxy group and the like, and preferable are a pentyloxy group, isoamyloxy group, hexyloxy group, octyloxy group, 2-ethylhexyloxy group, decyloxy group and 3,7-dimethyloctyloxy group.

[0034] The alkylthio group may be any of linear, branched or cyclic, and usually has about 1 to 20 carbon atoms, and specific examples thereof include a methylthio group, ethylthio group, propylthio group, i-propylthio group, butylthio group, i-butylthio group, t-butylthio group, pentylthio group, isoamylthio group, hexylthio group, cyclohexylthio group, heptylthio group, octylthio group, 2-ethylhexylthio group, nonylthio group, decylthio group, 3,7-dimethyloctylthio group, laurylthio group and the like, and preferable are a pentylthio group, isoamylthio group, hexylthio group, octylthio group, 2-ethylhexylthio group, decylthio group and 3,7-dimethyloctylthio group.

[0035] The alkylsilyl group may be any of linear, branched or cyclic, and usually has about 1 to 60 carbon atoms, and specific examples thereof include a methylsilyl group, ethylsilyl group, propylsilyl group, i-propylsilyl group, butylsilyl group, i-butylsilyl group, t-butylsilyl group, pentylsilyl group, isoamylsilyl group, hexylsilyl group, cyclohexylsilyl group, heptylsilyl group, octylsilyl group, 2-ethylhexylsilyl group, nonylsilyl group, decylsilyl group, 3,7-dimethyloctylsilyl group, laurylsilyl group, trimethylsilyl group, ethyldimethylsilyl group, propyldimethylsilyl group, i-propyldimethylsilyl group, butyldimethylsilyl group, t-butyldimethylsilyl group, pentyldimethylsilyl group, isoamyldimethylsilyl group, hexyldimethylsilyl group, heptyldimethylsilyl group, octyldimethylsilyl group, 2-ethylhexyl-dimethylsilyl group, nonyldimethylsilyl group, decyldimethylsilyl group, 3,7-dimethyloctyl-dimethylsilyl group, lauryldimethylsilyl group and the like, and preferable are a pentylsilyl group, isoamylsilyl group, hexylsilyl group, octylsilyl group, 2-ethylhexylsilyl group, decylsilyl group, 3,7-dimethyloctylsilyl group, pentyldimethylsilyl group, isoamyldimethylsilyl group, hexyldimethylsilyl group, octyldimethylsilyl group, 2-ethylhexyl-dimethylsilyl group, decyldimethylsilyl group and 3,7-dimethyloctyl-dimethylsilyl group.

[0036] The alkylamino group may be any of linear, branched or cyclic, may be a monoalkyl group or a dialkylamino group, and usually has about 1 to 40 carbon atoms, and specific examples thereof include a methylamino group, dimethylamino group, ethylamino group, diethylamino group, propylamino group, i-propylamino group, butylamino group, i-butylamino group, t-butylamino group, pentylamino group, isoamylamino group, hexylamino group, cyclohexylamino group, heptylamino group, octylamino group, 2-ethylhexylamino group, nonylamino group, decylamino group, 3,7-dimethyloctylamino group, laurylamino group and the like, and preferable are a pentylamino group, isoamylamino group, hexylamino group, octylamino group, 2-ethylhexylamino group, decylamino group and 3,7-dimethyloctylamino group.

[0037] The aryl group usually has about 6 to 60 carbon atoms, and specific examples thereof include a phenyl group, C₁ to C₁₂ alkoxyphenyl groups (C₁ to C₁₂ indicates 1 to 12 carbon atoms, the same in the following), C₁ to C₁₂ alkylphenyl groups, 1-naphthyl group, 2-naphthyl group and the like, and preferable are C₁ to C₁₂ alkoxyphenyl groups and C₁ to C₁₂ alkylphenyl groups. The aryl group is an atomic group obtained by removing one hydrogen atom from an aromatic hydrocarbon.

[0038] The aryloxy group usually has about 6 to 60 carbon atoms, and specific examples thereof include a phenoxy group, C₁ to C₁₂ alkoxyphenoxy groups, C₁ to C₁₂ alkylphenoxy groups, 1-naphthyloxy group, 2-naphthyloxy group and the like, and preferable are C₁ to C₁₂ alkoxyphenoxy groups and C₁ to C₁₂ alkylphenoxy groups.

[0039] The arylsilyl group usually has about 6 to 60 carbon atoms, and specific examples thereof include a phenylsilyl group, C₁ to C₁₂ alkoxyphenylsilyl groups, C₁ to C₁₂ alkylphenylsilyl groups, 1-naphthylsilyl group, 2-naphthylsilyl group, dimethylphenylsilyl group and the like, and preferable are C₁ to C₁₂ alkoxyphenylsilyl groups and C₁ to C₁₂ alkylphenylsilyl groups.

[0040] The arylamino group usually has about 6 to 60 carbon atoms, and specific examples thereof include a phenylamino group, diphenylamino group, C₁ to C₁₂ alkoxyphenylamino groups, di(C₁ to C₁₂ alkoxyphenyl) amino groups, di(C₁ to C₁₂ alkylphenyl)amino groups, 1-naphthylamino group, 2-naphthylamino group, and the like, and preferable are C₁ to C₁₂ alkylphenylamino groups and di(C₁ to C₁₂ alkylphenyl)amino groups.

[0041] The arylalkyl group usually has about 7 to 60 carbon atoms, and specific examples thereof include phenyl-C₁ to C₁₂ alkyl groups, C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkyl groups, C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkyl groups, 1-naphthyl-C₁ to C₁₂ alkyl groups, 2-naphthyl-C₁ to C₁₂ alkyl groups and the like, and preferable are C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkyl groups and C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkyl groups.

[0042] The arylalkoxy group usually has about 7 to 60 carbon atoms, and specific examples thereof include phenyl-C₁ to C₁₂ alkoxy groups, C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkoxy groups, C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkoxy groups, 1-naphthyl-C₁ to C₁₂ alkoxy groups, 2-naphthyl-C₁ to C₁₂ alkoxy groups and the like, and preferable are C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkoxy groups and C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkoxy groups.


[0043] The arylalkylsilyl group usually has about 7 to 60 carbon atoms, and specific examples thereof include phe-

nyl-C₁ to C₁₂ alkylsilyl groups, C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkylsilyl groups, C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkylsilyl groups, 1-naphthyl-C₁ to C₁₂ alkylsilyl groups, 2-naphthyl-C₁ to C₁₂ alkylsilyl groups, phenyl-C₁ to C₁₂ alkylidimethylsilyl groups and the like, and preferable are C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkylsilyl groups and C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkylsilyl groups.

[0044] The arylalkylamino group usually has about 7 to 60 carbon atoms, and specific examples thereof include phenyl-C₁ to C₁₂ alkylamino groups, C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkylamino groups, C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkylamino groups, di(C₁ to C₁₂ alkoxyphenyl-C₁ to C₁₂ alkyl)amino groups, di(C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkyl)amino groups, 1-naphthyl-C₁ to C₁₂ alkylamino groups, 2-naphthyl-C₁ to C₁₂ alkylamino groups and the like, and preferable are C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkylamino groups and di(C₁ to C₁₂ alkylphenyl-C₁ to C₁₂ alkyl)amino groups.


[0045] The monovalent heterocyclic compound group usually has about 4 to 60 carbon atoms, and specific examples thereof include a thienyl group, C₁ to C₁₂ alkylthienyl groups, pyrrolyl group, furyl group, pyridyl group, C₁ to C₁₂ alkylpyridyl groups and the like, and preferable are a thienyl group, C₁ to C₁₂ alkylthienyl groups, pyridyl group and C₁ to C₁₂ alkylpyridyl groups. The monovalent heterocyclic compound group means a residual atomic group obtained by removing one hydrogen atom from a heterocyclic compound.

[0046] In the formula (1), when b is 1, a repeating unit represented by the following formula (3) is formed.

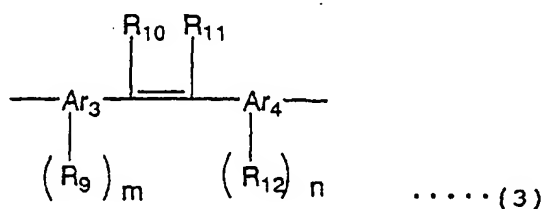


[0047] Ar₃ and Ar₄ in the repeating unit represented by the formula (3) represent the same group as exemplified for Ar₁. R₉ and R₁₂ in the formula (3) represent the same group as exemplified for R₁. R₁₀ and R₁₁ in the formula (3) represent the same group as exemplified for R₂. The symbols m and n do not represent 0 simultaneously. Groups R₁₀ and R₁₁ in the formula (3) may be in the relation of cis or trans.

[0048] Specifically, stilbene groups represented by the following formula (4) are exemplified.

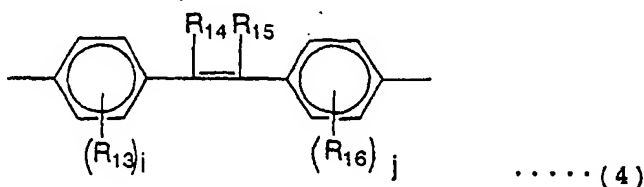

[0049] R₁₃ and R₁₆ in the formula (4) represent the same group as exemplified for R₁. R₁₄ and R₁₅ in the formula (4) represent the same group as exemplified for R₂. i and j each independently represent an integer of 0 to 4. i and j do not represent 0 simultaneously. Groups R₁₄ and R₁₅ in the formula (4) may be in the relation of cis or trans.


[0050] In the formula (1), when b is 2, a repeating unit represented by the following formula (5) is formed.



[0051] Ar₅, Ar₆ and Ar₇ in the repeating unit represented by the formula (5) represent the same group as exemplified for Ar₁. R₁₇, R₁₈, R₁₉ and R₂₀ in the formula (5) represent the same group as exemplified for R₂. One or more of R₁₇,


R_{18} , R_{19} and R_{20} represent a group other than a hydrogen atom and cyano group. Two or more of R_{17} to R_{20} may be mutually connected to form a ring. Further, when R_{17} to R_{20} are a group containing an alkyl chain, this alkyl chain may be interrupted with a group containing a hetero atom. Groups R_{17} and R_{18} in the formula (5) may be in the relation of cis or trans, and groups R_{19} and R_{20} may also be in the relation of cis or trans.

[0052] Specifically, distilbene groups having a substituent on a vinyne group represented by the following formula (6) are exemplified.

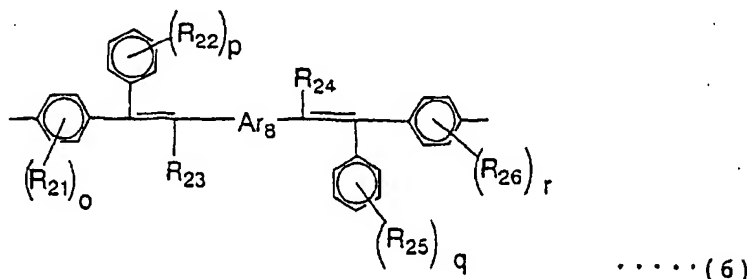


[0053] Ar_8 in the repeating unit represented by the formula (6) represents the same group as exemplified for Ar_1 . R_{21} , R_{22} , R_{25} and R_{26} in the formula (6) represent the same group as exemplified for R_1 . R_{23} and R_{24} in the formula (6) represent the same group as exemplified for R_2 . The symbols o and r each independently represent an integer of 0 to 4, and p and q each independently represent an integer of 0 to 5. When o is 2 or more, a plurality of R_{21} s may be the same or different. When p is 2 or more, a plurality of R_{22} s may be the same or different. When q is 2 or more, a plurality of R_{25} s may be the same or different. When r is 2 or more, a plurality of R_{26} s may be the same or different. Two or more of R_{21} to R_{26} may be connected to form a ring. Further, when R_{21} to R_{26} are a group containing an alkyl chain, this alkyl chain may be interrupted with a group containing a hetero atom.

[0054] R_{23} in the formula (6) and a group represented by the following formula:



may be in the relation of cis or trans, and R_{24} and a group represented by the following formula:



may also be in the relation of cis or trans.



[0055] In the repeating unit represented by the formula (2), k and l each independently represent an integer of 0 to 3. When k is 2 or more, a plurality of R_7 s may be the same or different. When l is 2 or more, a plurality of R_8 s may be the same or different. Two or more of R_5 to R_8 may be connected to form a ring. Further, when R_5 to R_8 are a group containing an alkyl chain, this alkyl chain may be interrupted with a group containing a hetero atom.

[0056] In the repeating unit represented by the formula (3), i and l each independently represent an integer of 0 to 4, and j and k each independently represent an integer of 0 to 5. When i is 2 or more, a plurality of R_9 s may be the same or different. When j is 2 or more, a plurality of R_{12} s may be the same or different. When k is 2 or more, a plurality of R_{13} s may be the same or different. When l is 2 or more, a plurality of R_{16} s may be the same or different. Two or more of R_9 to R_{14} may be connected to form a ring. Further, when R_9 to R_{14} are a group containing an alkyl chain, this

alkyl chain may be interrupted with a group containing a hetero atom.

[0057] Here, as the hetero atom, an oxygen atom, sulfur atom, nitrogen atom and the like are exemplified.

[0058] As the group containing a hetero atom, the following groups are exemplified.



[0059] Here, as R_1 , a hydrogen atom, alkyl groups having 1 to 20 carbon atoms, aryl groups having 6 to 60 carbon atoms, and monovalent heterocyclic compound groups having 4 to 60 carbon atoms are exemplified.

[0060] Substituents containing an alkyl group may be linear, branched or cyclic, or a combination thereof, and when not linear, there are exemplified an isoamyl group, 2-ethylhexyl group, 3,7-dimethyloctyl group, cyclohexyl group, 4- C_{12} alkylcyclohexyl group and the like. It is preferable that one or more of substituents of the formula (1) contain a cyclic or branched alkyl chain, for enhancing solubility of a polymeric fluorescent substance into a solvent.




[0061] It is preferable that the form of a repeating unit including a substituent has little symmetric property, for obtaining a material showing strong fluorescence.

[0062] Further, when R_1 and R_2 contain an aryl group and/or a heterocyclic compound group as a part of their structure, the aryl group and/or heterocyclic compound group may further have one or more substituents.

[0063] Furthermore, the end group of a polymeric fluorescent substance may also be protected with a stable group since if a polymerization active group remains intact, there is a possibility of reduction in light emitting property and life when the fluorescent substance is made into a device. Those having a conjugated bond continuing to a conjugated structure of the main chain are preferable, and there are exemplified structures connected to an aryl group or heterocyclic compound group via a carbon-carbon bond. Specifically, substituents of the chemical formula 10 in JP-A No. 9-45478 and the like are exemplified.

[0064] As the method of synthesizing the polymeric fluorescent substance, there are exemplified a method in which polymerization is effected according to a Suzuki coupling reaction from the corresponding monomer, a method in which polymerization is effected according to a Grignard reaction, a method in which polymerization is effected using a $Ni(0)$ catalyst, a method in which polymerization is effected using an oxidizing agent such as $FeCl_3$ and the like, a method of effecting oxidation polymerization electrochemically, a method according to decomposition of an intermediate polymer having a suitable releasing group, and the like. Of them, the method of effecting polymerization according to a Suzuki coupling reaction, the method of effecting polymerization according to a Grignard reaction, the method of effecting polymerization using a $Ni(0)$ catalyst are preferable since reaction control is easy.

[0065] The polymeric fluorescent substance may contain a repeating unit other than repeating units represented by the formula (1) or (2), in an amount which does not deteriorate fluorescent property and charge carrying property. Further, repeating units represented by the formula (1) or (2) and other repeating units may be connected with a non-conjugation unit, or such a non-conjugation part may be contained in the repeating unit. As the bonding structure, there are exemplified those illustrated below, those obtained by combining those illustrated below with a vinylene group, those obtained by combining two or more of those illustrated below, and the like. Here, R represents a group selected from the group consisting of a hydrogen atom, alkyl groups having 1 to 20 carbon atom, aryl groups having 6 to 60 carbon atoms and heterocyclic compound groups having 4 to 60 carbon atoms, and Ar represents a hydrocarbon group having 6 to 60 carbon atoms.

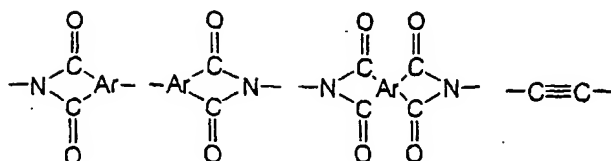

[0066] This polymeric fluorescent substance may also be a random, block or graft copolymer, or a polymer having an intermediate structure thereof, for example, a random copolymer having blocking property. From the viewpoint for obtaining apolymeric fluorescent substance having high fluorescent quantum yield, random copolymers having blocking property and block or graft copolymers are more preferable than complete random copolymers. Further, copolymers may have branched main chain and more than three terminals.

[0067] Further, as the polymeric fluorescent substance, those emitting fluorescence in a solid state are suitably used, since the material utilizes light emission from a thin film.

[0068] As good solvents for the polymeric fluorescent substance, there are exemplified chloroform, methylene chloride, dichloroethane, tetrahydrofuran, toluene, xylene, mesitylene, tetralin, decalin, n-butylbenzene and the like. The polymeric fluorescent substance can be usually dissolved in these solvents in an amount of 0.1 wt % or more, though the amount differs depending on the structure and molecular weight of the polymeric fluorescent substance.

[0069] The polymeric fluorescent substance has a polystyrene-reduced number-average molecular weight of 5×10^4 to 1×10^8 , and the degree of polymerization thereof also changes depending on repeating structures and proportion thereof. From the standpoint of film forming property, generally the total amount of repeating structures is preferably from 20 to 10000, more preferably from 30 to 10000, particularly preferably from 50 to 5000.

[0070] When these polymeric fluorescent substances are used as a light emitting material of a polymer LED, the purity thereof exerts an influence on light emitting property, therefore, it is preferable that a monomer before polymerization is purified by a method such as distillation, sublimation purification, re-crystallization and the like before being polymerized and further, it is preferable to conduct a purification treatment such as re-precipitation purification, chromatographic separation and the like after the synthesis.

[0071] The polymeric fluorescent substance of the present invention can be used not only as a light emitting material, but also as an organic semiconductor material, optical material, or as conductive material by doping.

[0072] Next, the polymer LED of the present invention will be illustrated. The polymer LED of the present invention is a polymer LED comprising at least a light emitting layer between a pair of electrodes composed of an anode and a cathode at least one of which is transparent or semi-transparent wherein the light emitting layer contains a polymeric fluorescent substance of the present invention.

[0073] As the polymer LED of the present invention, there are listed polymer LEDs having an electron transporting layer disposed between a cathode and a light emitting layer, polymer LEDs having a hole transporting layer disposed between an anode and a light emitting layer, polymer LEDs having an electron transporting layer disposed between a cathode and a light emitting layer and having a hole transporting layer disposed between an anode and a light emitting layer.

[0074] For example, the following structures a) to d) are specifically exemplified.

a) anode/light emitting layer/cathode

b) anode/hole transporting layer/light emitting layer/cathode

c) anode/light emitting layer/electron transporting layer//cathode

d) anode/hole transporting layer/light emitting layer/electron transporting layer/cathode

(wherein, / indicates adjacent lamination of layers. Hereinafter, the same)

[0075] Herein, the light emitting layer is a layer having function to emit a light, the hole transporting layer is a layer having function to transport a hole, and the electron transporting layer is a layer having function to transport an electron. Herein, the electron transporting layer and the hole transporting layer are generically called a charge transporting layer.

[0076] The light emitting layer, hole transporting layer and electron transporting layer may also each independently used in two or more layers.

[0077] Of charge transporting layers disposed adjacent to an electrode, that having function to improve charge injecting efficiency from the electrode and having effect to decrease driving voltage of an device are particularly called sometimes a charge injecting layer (hole injecting layer, electron injecting layer) in general.

[0078] For enhancing adherence with an electrode and improving charge injection from an electrode, the above-described charge injecting layer or insulation layer having a thickness of 2 nm or less may also be provided adjacent to an electrode, and further, for enhancing adherence of the interface, preventing mixing and the like, a thin buffer layer may also be inserted into the interface of a charge transporting layer and light emitting layer.

[0079] The order and number of layers laminated and the thickness of each layer can be appropriately applied while considering light emitting efficiency and life of the device.

[0080] In the present invention, as the polymer LED having a charge injecting layer (electron injecting layer, hole injecting layer) provided, there are listed a polymer LED having a charge injecting layer provided adjacent to a cathode and a polymer LED having a charge injecting layer provided adjacent to an anode.

[0081] For example, the following structures e) to p) are specifically exemplified.

e) anode/charge injecting layer/light emitting layer/cathode

f) anode/light emitting layer/charge injecting layer/cathode

g) anode/charge injecting layer/light emitting layer/charge injecting layer/cathode

h) anode/charge injecting layer/hole transporting layer/light emitting layer/cathode

i) anode/hole transporting layer/light emitting layer/charge injecting layer/cathode

j) anode/charge injecting layer/hole transporting layer/light emitting layer/charge injecting layer/cathode

k) anode/charge injecting layer/light emitting layer/electron transporting layer/cathode

l) anode/light emitting layer/electron transporting layer/charge injecting layer/cathode

m) anode/charge injecting layer/light emitting layer/electron transporting layer/charge injecting layer/cathode

n) anode/charge injecting layer/hole transporting layer/light emitting layer/electron transporting layer/cathode

o) anode/hole transporting layer/light emitting layer/electron transporting layer/charge injecting layer/cathode

p) anode/charge injecting layer/hole transporting layer/light emitting layer/electron transporting layer/charge injecting layer/cathode

[0082] As the specific examples of the charge injecting layer, there are exemplified layers containing an conducting polymer, layers which are disposed between an anode and a hole transporting layer and contain a material having an ionization potential between the ionization potential of an anode material and the ionization potential of a hole transporting material contained in the hole transporting layer, layers which are disposed between a cathode and an electron transporting layer and contain a material having an electron affinity between the electron affinity of a cathode material and the electron affinity of an electron transporting material contained in the electron transporting layer, and the like.

[0083] When the above-described charge injecting layer is a layer containing an conducting polymer, the electric conductivity of the conducting polymer is preferably 10^{-5} S/cm or more and 10^3 S/cm or less, and for decreasing the leak current between light emitting pixels, more preferably 10^{-5} S/cm or more and 10^2 S/cm or less, further preferably 10^{-5} S/cm or more and 10^1 S/cm or less.

[0084] Usually, to provide an electric conductivity of the conducting polymer of 10^{-5} S/cm or more and 10^3 S/cm or less, a suitable amount of ions are doped into the conducting polymer.

[0085] Regarding the kind of an ion doped, an anion is used in a hole injecting layer and a cation is used in an electron injecting layer. As examples of the anion, a polystyrene sulfonate ion, alkylbenzene sulfonate ion, camphor sulfonate ion and the like are exemplified, and as examples of the cation, a lithium ion, sodium ion, potassium ion, tetrabutyl ammonium ion and the like are exemplified.

[0086] The thickness of the charge injecting layer is for example, from 1 nm to 100 nm, preferably from 2 nm to 50 nm.

[0087] Materials used in the charge injecting layer may properly be selected in view of relation with the materials of electrode and adjacent layers, and there are exemplified conducting polymers such as polyaniline and derivatives thereof, polythiophene and derivatives thereof, polypyrrole and derivatives thereof, poly(phenylene vinylene) and derivatives thereof, poly(thienylene vinylene) and derivatives thereof, polyquinoline and derivatives thereof, polyquinoxaline and derivatives thereof.

line and derivatives thereof, polymers containing aromatic amine structures in the main chain or the side chain, and the like, and metal phthalocyanine (copper phthalocyanine and the like), carbon and the like.

[0088] The insulation layer having a thickness of 2 nm or less has function to make charge injection easy. As the material of the above-described insulation layer, metal fluoride, metal oxide, organic insulation materials and the like are listed. As the polymer LED having an insulation layer having a thickness of 2 nm or less, there are listed polymer LEDs having an insulation layer having a thickness of 2 nm or less provided adjacent to a cathode, and polymer LEDs having an insulation layer having a thickness of 2 nm or less provided adjacent to an anode.

[0089] Specifically, there are listed the following structures

q) to ab) for example.

q) anode/insulation layer having a thickness of 2 nm or less/light emitting layer/cathode

r) anode/light emitting layer/insulation layer having a thickness of 2 nm or less/cathode

s) anode/insulation layer having a thickness of 2 nm or less/light emitting layer/insulation layer having a thickness of 2 nm or less/cathode

t) anode/insulation layer having a thickness of 2 nm or less/hole transporting layer/light emitting layer/cathode

u) anode/hole transporting layer/light emitting layer/insulation layer having a thickness of 2 nm or less/cathode

v) anode/insulation layer having a thickness of 2 nm or less/hole transporting layer/light emitting layer/insulation layer having a thickness of 2 nm or less/cathode

w) anode/insulation layer having a thickness of 2 nm or less/light emitting layer/electron transporting layer/cathode

x) anode/light emitting layer/electron transporting layer/insulation layer having a thickness of 2 nm or less/cathode

y) anode/insulation layer having a thickness of 2 nm or less/light emitting layer/electron transporting layer/insulation layer having a thickness of 2 nm or less/cathode

z) anode/insulation layer having a thickness of 2 nm or less/hole transporting layer/light emitting layer/electron transporting layer/cathode

aa) anode/hole transporting layer/light emitting layer/electron transporting layer/insulation layer having a thickness of 2 nm or less/cathode

ab) anode/insulation layer having a thickness of 2 nm or less/hole transporting layer/light emitting layer/electron transporting layer/insulation layer having a thickness of 2 nm or less/cathode

[0090] In producing a polymer LED, when a film is formed from a solution by using such polymeric fluorescent substance soluble in an organic solvent, only required is removal of the solvent by drying after coating of this solution, and even in the case of mixing of a charge transporting material and a light emitting material, the same method can be applied, causing an extreme advantage in production. As the film forming method from a solution, there can be used coating methods such as a spin coating method, casting method, micro gravure coating method, gravure coating method, bar coating method, roll coating method, wire bar coating method, dip coating method, spray coating method, screen printing method, flexo printing method, offset printing method, inkjet printing method and the like.

[0091] Regarding the thickness of the light emitting layer, the optimum value differs depending on material used, and may properly be selected so that the driving voltage and the light emitting efficiency become optimum values, and for example, it is from 1 nm to 1 μ m, preferably from 2 nm to 500 nm, further preferably from 5 nm to 200 nm.

[0092] In the polymer LED of the present invention, a light emitting material other than the above-mentioned polymeric fluorescent substances may be mixed in a light emitting layer. Further, in the polymer LED according to the instant application, a light emitting layer containing a light emitting material other than the above-mentioned polymeric fluorescent substance may be laminated with a light emitting layer containing the above-mentioned polymeric fluorescent substance.

[0093] As the light emitting material, known materials can be used. In a compound having lower molecular weight, there can be used, for example, naphthalene derivatives, anthracene or derivatives thereof, perylene or derivatives thereof; dyes such as polymethine dyes, xanthene dyes, coumarine dyes, cyanine dyes; metal complexes of 8-hydroxyquinoline or derivatives thereof, aromatic amine, tetraphenylcyclopentane or derivatives thereof, or tetraphenylbutadiene or derivatives thereof, and the like.

[0094] Specifically, there can be used known compounds such as those described in JP-A Nos. 57-51781, 59-195393 and the like, for example.

[0095] When the polymer LED of the present invention has a hole transporting layer, as the hole transporting materials used, there are exemplified polyvinylcarbazole or derivatives thereof, polysilane or derivatives thereof, polysiloxane derivatives having an aromatic amine in the side chain or the main chain, pyrazoline derivatives, arylamine derivatives, stilbene derivatives, triphenyldiamine derivatives, polyaniline or derivatives thereof, polythiophene or derivatives thereof, polypyrrole or derivatives thereof, poly(p-phenylenevinylene) or derivatives thereof, poly(2,5-thienylenevinylene) or derivatives thereof, or the like.

[0096] Specific examples of the hole transporting material include those described in JP-A Nos. 63-70257,

63-175860, 2-135359, 2-135361, 2-209988, 3-37992 and 3-152184.

[0097] Among them, as the hole transporting materials used in the hole transporting layer, preferable are polymer hole transporting materials such as polyvinylcarbazole or derivatives thereof, polysilane or derivatives thereof, polysiloxane derivatives having an aromatic amine compound group in the side chain or the main chain, polyaniline or derivatives thereof, polythiophene or derivatives thereof, poly(p-phenylenevinylene) or derivatives thereof, poly(2,5-thienylenevinylene) or derivatives thereof, or the like, and further preferable are polyvinylcarbazole or derivatives thereof, polysilane or derivatives thereof and polysiloxane derivatives having an aromatic amine compound group in the side chain or the main chain. In the case of a hole transporting material having lower molecular weight, it is preferably dispersed in a polymer binder for use.

[0098] Polyvinylcarbazole or derivatives thereof are obtained, for example, by cation polymerization or radical polymerization from a vinyl monomer.

[0099] As the polysilane or derivatives thereof, there are exemplified compounds described in Chem. Rev., 89, 1359 (1989) and GB 2300196 published specification, and the like. For synthesis, methods described in them can be used, and a Kipping method can be suitably used particularly.

[0100] As the polysiloxane or derivatives thereof, those having the structure of the above-described hole transporting material having lower molecular weight in the side chain or main chain, since the siloxane skeleton structure has poor hole transporting property. Particularly, there are exemplified those having an aromatic amine having hole transporting property in the side chain or main chain.

[0101] The method for forming a hole transporting layer is not restricted, and in the case of a hole transporting layer having lower molecular weight, a method in which the layer is formed from a mixed solution with a polymer binder is exemplified. In the case of a polymer hole transporting material, a method in which the layer is formed from a solution is exemplified.

[0102] The solvent used for the film forming from a solution is not particularly restricted providing it can dissolve a hole transporting material. As the solvent, there are exemplified chlorine solvents such as chloroform, methylene chloride, dichloroethane and the like, ether solvents such as tetrahydrofuran and the like, aromatic hydrocarbon solvents such as toluene, xylene and the like, ketone solvents such as acetone, methyl ethyl ketone and the like, and ester solvents such as ethyl acetate, butyl acetate, ethylcellosolve acetate and the like.

[0103] As the film forming method from a solution, there can be used coating methods such as a spin coating method, casting method, micro gravure coating method, gravure coating method, bar coating method, roll coating method, wire bar coating method, dip coating method, spray coating method, screenprinting method, flexo printing method, offset printing method, inkjet printing method and the like, from a solution.

[0104] The polymer binder mixed is preferably that does not disturb charge transport extremely, and that does not have strong absorption of a visible light is suitably used. As such polymer binder, polycarbonate, polyacrylate, poly(methyl acrylate), poly(methylmethacrylate), polystyrene, poly(vinylchloride), polysiloxane and the like are exemplified.

[0105] Regarding the thickness of the hole transporting layer, the optimum value differs depending on material used, and may properly be selected so that the driving voltage and the light emitting efficiency become optimum values, and at least a thickness at which no pin hole is produced is necessary, and too large thickness is not preferable since the driving voltage of the device increases. Therefore, the thickness of the hole transporting layer is, for example, from 1 nm to 1 μ m, preferably from 2 nm to 500 nm, further preferably from 5 nm to 200 nm.

[0106] When the polymer LED of the present invention has an electron transporting layer, known compounds are used as the electron transporting materials, and there are exemplified oxadiazole derivatives, anthraquinonedimethane or derivatives thereof, benzoquinone or derivatives thereof, naphthoquinone or derivatives thereof, anthraquinone or derivatives thereof, tetracyanoanthraquinodimethane or derivatives thereof, fluorenone derivatives, diphenyldicyanoethylene or derivatives thereof, diphenoquinone derivatives, or metal complexes of 8-hydroxyquinoline or derivatives thereof, polyquinoline and derivatives thereof, polyquinoxaline and derivatives thereof, polyfluorene or derivatives thereof, and the like.

[0107] Specifically, there are exemplified those described in JP-A Nos. 63-70257, 63-175860, 2-135359, 2-135361, 2-209988, 3-37992 and 3-152184.

[0108] Among them, oxadiazole derivatives, benzoquinone or derivatives thereof, anthraquinone or derivatives thereof, or metal complexes of 8-hydroxyquinoline or derivatives thereof, polyquinoline and derivatives thereof, polyquinoxaline and derivatives thereof, polyfluorene or derivatives thereof are preferable, and 2-(4-biphenyl)-5-(4-t-butylphenyl)-1,3,4-oxadiazole, benzoquinone, anthraquinone, tris(8-quinolinol)aluminum and polyquinoline are further preferable.

[0109] The method for forming the electron transporting layer is not particularly restricted, and in the case of an electron transporting material having lower molecular weight, a vapor deposition method from a powder, or a method of film-forming from a solution or melted state is exemplified, and in the case of a polymer electron transporting material, a method of film-forming from a solution or melted state is exemplified, respectively.

[0110] The solvent used in the film-forming from a solution is not particularly restricted provided it can dissolve elec-

tron transporting materials and/or polymer binders. As the solvent, there are exemplified chlorine solvents such as chloroform, methylene chloride, dichloroethane and the like, ether solvents such as tetrahydrofuran and the like, aromatic hydrocarbon solvents such as toluene, xylene and the like, ketone solvents such as acetone, methyl ethyl ketone and the like, and ester solvents such as ethyl acetate, butyl acetate, ethylcellosolve acetate and the like.

[0111] As the film-forming method from a solution or melted state, there can be used coating methods such as a spin coating method, casting method, micro gravure coating method, gravure coating method, bar coating method, roll coating method, wire bar coating method, dip coating method, spray coating method, screen printing method, flexo printing method, offset printing method, inkjet printing method and the like.

[0112] The polymer binder to be mixed is preferably that which does not extremely disturb a charge transport property, and that does not have strong absorption of a visible light is suitably used. As such polymer binder, poly(N-vinylcarbazole), polyaniline or derivatives thereof, polythiophene or derivatives thereof, poly(p-phenylenevinylene) or derivatives thereof, poly(2,5-thienylene vinylene) or derivatives thereof, polycarbonate, polyacrylate, poly(methyl acrylate), poly(methylmethacrylate), polystyrene, poly(vinyl chloride), polysiloxane and the like are exemplified.

[0113] Regarding the thickness of the electron transporting layer, the optimum value differs depending on material used, and may properly be selected so that the driving voltage and the light emitting efficiency become optimum values, and at least a thickness at which no pin hole is produced is necessary, and too large thickness is not preferable since the driving voltage of the device increases. Therefore, the thickness of the electron transporting layer is, for example, from 1 nm to 1 μ m, preferably from 2 nm to 500 nm, further preferably from 5 nm to 200 nm.

[0114] The substrate forming the polymer LED of the present invention may preferably be that does not change in forming an electrode and layers of organic materials, and there are exemplified glass, plastics, polymer film, silicon substrates and the like. In the case of a opaque substrate, it is preferable that the opposite electrode is transparent or semitransparent.

[0115] In the present invention, it is preferable that an anode is transparent or semitransparent, and as the material of this anode, electron conductive metal oxide films, semitransparent metal thin films and the like are used. Specifically, there are used indium oxide, zinc oxide, tin oxide, and films (NESA and the like) fabricated by using an electron conductive glass composed of indium-tin-oxide (ITO), indium-zinc-oxide and the like, which are metal oxide complexes, and gold, platinum, silver, copper and the like are used, and among them, ITO, indium-zinc-oxide, tin oxide are preferable. As the fabricating method, a vacuum vapor deposition method, sputtering method, ion plating method, plating method and the like are used. As the anode, there may also be used organic transparent conducting films such as polyaniline or derivatives thereof, polythiophene or derivatives thereof and the like.

[0116] The thickness of the anode can be appropriately selected while considering transmission of a light and electric conductivity, and for example, from 10 nm to 10 μ m, preferably from 20 nm to 1 μ m, further preferably from 50 nm to 500 nm.

[0117] Further, for easy charge injection, there may be provided on the anode a layer comprising a phthalocyanine derivative conducting polymers, carbon and the like, or a layer having an average film thickness of 2 nm or less comprising a metal oxide, metal fluoride, organic insulating material and the like.

[0118] As the material of a cathode used in the polymer LED of the present invention, that having lower work function is preferable. For example, there are used metals such as lithium, sodium, potassium, rubidium, cesium, beryllium, magnesium, calcium, strontium, barium, aluminum, scandium, vanadium, zinc, yttrium, indium, cerium, samarium, europium, terbium, ytterbium and the like, or alloys comprising two or more of them, or alloys comprising one or more of them with one or more of gold, silver, platinum, copper, manganese, titanium, cobalt, nickel, tungsten and tin, graphite or graphite intercalation compounds and the like. Examples of alloys include a magnesium-silver alloy, magnesium-indium alloy, magnesium-aluminum alloy, indium-silver alloy, lithium-aluminum alloy, lithium-magnesium alloy, lithium-indium alloy, calcium-aluminum alloy and the like. The cathode may be formed into a laminated structure of two or more layers.

[0119] The film thickness of a cathode can be appropriately selected in view of electric conductivity and durability, and for example, it is from 10 nm to 10 μ m, preferably from 20 nm to 1 μ m, further preferably from 50 nm to 500 nm.

[0120] As the method for fabricating a cathode, there are used a vacuum vapor deposition method, sputtering method, lamination method in which a metal thin film is adhered under heat and pressure, and the like. Further, there may also be provided, between a cathode and an organic layer, a layer comprising an conducting polymer, or a layer having an average film thickness of 2 nm or less comprising a metal oxide, metal fluoride, organic insulation material and the like, and after fabrication of the cathode, a protective layer may also be provided which protects the polymer LED. For stable use of the polymer LED for a long period of time, it is preferable to provide a protective layer and/or protective cover for protection of the device in order to prevent it from outside damage.

[0121] As the protective layer, there can be used a polymer compound, metal oxide, metal fluoride, metal borate and the like. As the protective cover, there can be used a glass plate, a plastic plate the surface of which has been subjected to lower-water-permeation treatment, and the like, and there is suitably used a method in which the cover is pasted with an device substrate by a thermosetting resin or light-curing resin for sealing. If space is maintained using a spacer,

it is easy to prevent an device from being injured. If an inner gas such as nitrogen and argon is sealed in this space, it is possible to prevent oxidation of a cathode, and further, by placing a desiccant such as barium oxide and the like in the above-described space, it is easy to suppress the damage of an device by moisture adhered in the production process. Among them, any one means or more are preferably adopted.

[0122] For obtaining light emission in plane form using the polymer LED of the present invention, an anode and a cathode in the plane form may properly be placed so that they are laminated each other. Further, for obtaining light emission in pattern form, there are a method in which a mask with a window in pattern form is placed on the above-described plane light emitting device, a method in which an organic layer in non-light emission part is formed to obtain extremely large thickness providing substantial non-light emission, and a method in which any one of an anode or a cathode, or both of them are formed in the pattern. By forming a pattern by any of these methods and by placing some electrodes so that independent on/off is possible, there is obtained a display device of segment type which can display digits, letters, simple marks and the like. Further, for forming a dot matrix device, it may be advantageous that anodes and cathodes are made in the form of stripes and placed so that they cross at right angles. By a method in which a plurality of kinds of polymeric fluorescent substances emitting different colors of lights are placed separately or a method in which a color filter or luminescence converting filter is used, area color displays and multi color displays are obtained. A dot matrix display can be driven by passive driving, or by active driving combined with TFT and the like. These display devices can be used as a display of a computer, television, portable terminal, portable telephone, car navigation, view finder of a video camera, and the like.

[0123] Further, the above-described light emitting device in plane form is a thin self-light-emitting one, and can be suitably used as a flat light source for back-light of a liquid crystal display, or as a flat light source for illumination. Further, if a flexible plate is used, it can also be used as a curved light source or a display.

EXAMPLES

[0124] The following examples further illustrate the present invention in detail but do not limit the scope thereof.


[0125] Herein, regarding the number average molecular weight, a polystyrene reduced number-average molecular weight was measured by gel permeation chromatography (GPC) using chloroform as a solvent.

Example 1


<Synthesis of Polymeric fluorescent substance 1>

[0126] Under an inert atmosphere, 9,9-dioctylfluorene-2,7-bis(ethylene boronate) (317 mg, 0.598 mmol), 2,7-dibromo-9,9-dioctylfluorene (250 mg, 0.456 mmol), 4,4'-dibromo-2,2',5,5'-tetrakis(2,7-dimethyloctyloxy)stilbene (110 mg, 0.114 mmol) and aliquat® 336 (tricaprylmethylammonium chloride, manufactured by Aldrich, 220 mg, 0.547 mmol) were dissolved in toluene (10 ml) and to this was added 10 ml of an aqueous solution of potassium carbonate (295 mg, 2.14 mmol). Further, tetrakis(triphenylphosphine)palladium (20 mg, 0.018 mmol) was added, and the mixture was heated under reflux for 20 hours. After cooling, the solution was separated, and the organic layer was washed with water.

[0127] This organic layer was dropped into methanol, and the deposited precipitate was filtrated off. The precipitate was purified by silica gel chromatography (toluene), to obtain poly(9,9-dioctylfluorene-2,7-diyl-co-2,2',5,5'-tetrakis(3,7-dimethyloctyloxy)stilbene-4,4'-diyl) (Polymeric fluorescent substance 1). The yield was 350 mg. The ratio of repeating units represented by the formulae (7) and (8) in Polymeric fluorescent substance 1 was 9 : 1 depending on monomer charging ratio.



..... (7)

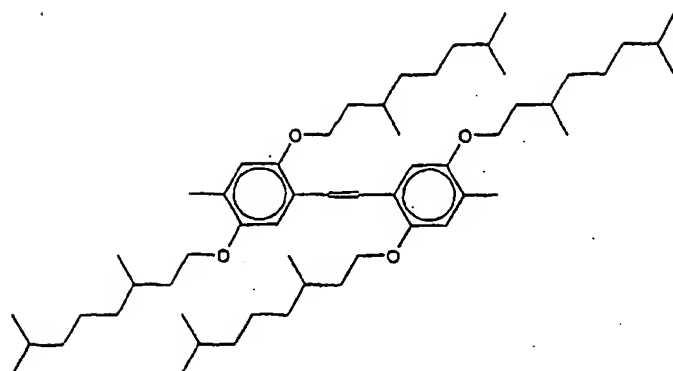

[0128] Polymeric fluorescent substance 1 had a polystyrene-reduced number-average molecular weight of 1.3×10^4 . Polymeric fluorescent substance 1 could be dissolved in a solvent such as toluene, chloroform and the like.

<Evaluation of fluorescent property>

[0129] A 0.4 wt% chloroform solution of Polymeric fluorescent substance 1 was spin-coated on quartz, to form a thin film of Polymeric fluorescent substance 1. The ultraviolet visible absorption spectrum and fluorescent spectrum of this thin film were measured by using a ultraviolet visible absorption spectrophotometer (UV3500 manufactured by Hitachi, Ltd.) and a fluorescent spectrophotometer (850 manufactured by Hitachi, Ltd.), respectively. For calculation of fluorescent strength, a fluorescent spectrum excited at 350 nm was used. The area of fluorescent spectra plotted against wave-number on the abscissa was divided by the absorption at 350 nm, to obtain a relative value of the fluorescent strength.

[0130] Polymeric fluorescent substance 1 has a fluorescent peak wave-length of 470 nm, and revealed a relative value of the fluorescent strength of 2.2.

<Production and evaluation of the device>

[0131] On a glass substrate on which an ITO film had been made at a thickness of 150 nm according to a sputtering method, a film having a thickness of 50 nm was formed using a solution (Baytron, manufactured by Bayer) of poly (ethylenedioxythiophene)/polystyrenesulfonic acid by spin coating, and the film was dried at 120°C for 10 minutes on a hot plate. Then, a film having a thickness of about 70 nm was formed using a 1.5 wt% toluene solution of Polymeric fluorescent substance 1 by spin coating. Further, this film was dried at 80°C for 1 hour under reduced pressure, then, lithium fluoride was vapor-deposited at 0.4 nm as a cathode buffer layer, calcium was vapor-deposited at 25 nm and aluminum was vapor-deposited at 40 nm as a cathode, to produce a polymer LED. In any vapor deposition, the degree of vacuum was 1 to 8×10^{-6} Torr. Voltage was applied on the resulted device, to give EL light emission from Polymeric fluorescent substance 1. The strength of EL light emission was approximately in proportion to the current density.

Example 2

[0132] Poly(9,9-dioctylfluorene-2,7-diyl-co-2,2',5,5'-tetrakis(3,7-dimethyloctyloxy)stilbene-4,4'-diyl) (Polymeric fluorescent substance 2) was obtained in the same manner as in Example 1 except that 2,7-dibromo-9,9-dioctylfluorene and 4,4'-dibromo-2,2',5,5'-tetrakis(2,7-dimethyloctyloxy)stilbene were used at a molar ratio of 2:3. Polymeric fluorescent substance 2 contained repeating units represented by the formulae (7) and (8) copolymerized at a molar ratio of 7:3.

<Evaluation of fluorescent property>

[0133] The relative value of the fluorescent strength of Polymeric fluorescent substance 2 was obtained in the same manner as in Example 1.

[0134] Polymeric fluorescent substance 2 had a fluorescent peak wave-length of 470 nm and showed a relative value of the fluorescent strength of 1.9.



Example 3

<Synthesis of 4,4'-bis(2-(4-bromophenyl)-2-phenyl-ethenyl)-biphenyl>

[0135] Under an inert atmosphere, 4-bromobenzophenone (0.783 g, 3 mmol) and 4,4'-bis-(diethylmethyl phospho-
 nate)-biphenyl (0.559 g, 1.23 mmol) were added to and dissolved in tetrahydrofuran (10 g). At room temperature, a
 solution of tert-butoxypotassium (0.414 g, 3.69 mmol) in tetrahydrofuran (3.28 g) was added dropwise over 5 minutes.
 The mixture was stirred under this condition for 3.5 hours. The reaction mixture was added into water (100 ml) and the
 mixture was neutralized with 5% sulfuric acid. After neutralization, toluene (250 ml) was added to separate an organic
 layer. The organic layer was washed with water, and dried with anhydrous sodium sulfate. The solvent was distilled
 off under reduced pressure, and the resulted crude product was purified by silica gel chromatography, to obtain the
 intended substance. The yielded amount was 0.34 g and the yield was 41%.

<Synthesis of Polymeric fluorescent substance 3>

[0136] Under an inert atmosphere, 2,7-dibromo-9,9-dioctylfluorene (560 mg, 1.0 mmol), 4,4'-bis(2-(4-bromophenyl)-
 2-phenyl-ethenyl)-biphenyl (76 mg, 0.11 mmol) were dissolved in tetrahydrofuran (10 ml), and to this was added mag-
 nesium (55 mg, 2.3 mmol), nickel chloride (NiCl_2) (10 mg, 0.079 mmol) and bipyridyl (12 mg, 0.079 mmol), and the
 mixture was heated under reflux for 5 hours. After cooling, the reaction solution was added dropwise into methanol
 (100 ml), and the deposited precipitate was filtrated off. The resulted precipitate was dissolved in toluene, washed with
 dilute hydrochloric acid, then, washed with water until pH of the washing solution reached 7, then, the organic layer
 was distilled off under reduced pressure. The residue was dissolved in 20 ml of toluene, and re-precipitated from 100
 ml of methanol, to give Polymeric fluorescent substance 3. The yielded amount was 238 mg. Polymeric fluorescent
 substance 3 contained repeating units represented by the following formulae (7) and (9) at a molar ratio of about 9:1,
 depending on the charging ratio of monomers.

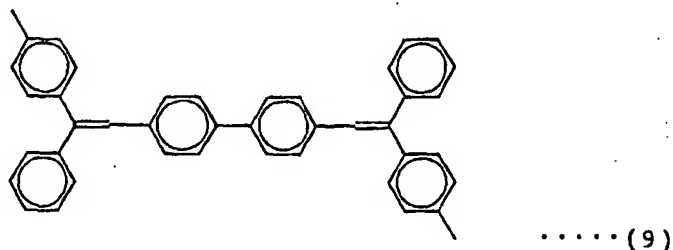

[0137] Polymeric fluorescent substance 3 had a polystyrene-reduced average molecular weight of $M_w=26,400$,
 $M_n=8,800$. Polymeric fluorescent substance 3 could be dissolved in a solvent such as toluene, chloroform and the like.

<Evaluation of fluorescent property>

[0138] The relative value of the fluorescent strength of Polymeric fluorescent substance 3 was obtained in the same
 manner as in Example 1.

[0139] Polymeric fluorescent substance 3 had a fluorescent peak wave-length of 476 nm and showed a relative value
 of the fluorescent strength of 4.2.

<Production and evaluation of the device>



[0140] Polymer LED was fabricated in the same manner as in Example 1 except for using polymeric fluorescent
 substance 3 in place of polymeric fluorescent substance 1. Voltage was applied on the resulted device, to give EL light

emission from Polymeric fluorescent substance 3. The strength of EL light emission was approximately in proportion to the current density.

Example 4

<Synthesis of Polymeric fluorescent substance 4>

[0141] Polymeric fluorescent substance 4 was obtained in the same manner as in Example 3 except that 1,4-bis(2-(4-bromophenyl)-2-phenyl-ethenyl-2-(2-ethylhexyl oxy)-5-methoxybenzene was used instead of 4,4'-bis(2-(4-bromophenyl)-2-phenyl-ethenyl)-biphenyl. The yielded amount was 201 mg. Polymeric fluorescent substance 4 contained repeating units represented by the following formulae (7) and (10) at a molar ratio of about 9:1, depending on the charging ratio of monomers.

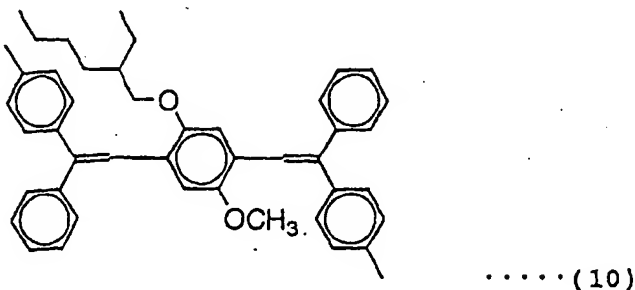

[0142] Polymeric fluorescent substance 4 had a polystyrene-reduced average molecular weight of $M_w=25,600$, $M_n=8,400$. Polymeric fluorescent substance 3 could be dissolved in a solvent such as toluene, chloroform and the like.

<Evaluation of fluorescent property>

[0143] The relative value of the fluorescent strength of Polymeric fluorescent substance 4 was obtained in the same manner as in Example 1.

[0144] Polymeric fluorescent substance 4 had a fluorescent peak wave-length of 504 nm and showed a relative value of the fluorescent strength of 2.9.



<Production and evaluation of the device>

[0145] Polymer LED was fabricated in the same manner as in Example 1 except for using polymeric fluorescent substance 4 in place of polymeric fluorescent substance 1. Voltage was applied on the resulted device, to give EL light emission from Polymeric fluorescent substance 4. The strength of EL light emission was approximately in proportion to the current density.

Example 5

[0146] Under an inert atmosphere, 2,7-dibromo-9,9-dioctylfluorene (560 mg, 1.0 mmol), 2,5-bis(2-(4-bromophenyl)-2-phenyl-ethenyl)-2-octyldimethyl isilylbenzene (83 mg, 0.11 mmol) were dissolved in tetrahydrofuran (10 ml), and to

this was added magnesium (53 mg, 2.2 mmol), nickel chloride (NiCl_2) (10 mg, 0.077 mmol) and bipyridyl (12 mg, 0.077 mmol), and the mixture was heated under reflux for 5 hours. After cooling, the reaction solution was added dropwise into methanol (100 ml), and the deposited precipitate was filtrated off. The resulted precipitate was dissolved in toluene, washed with dilute hydrochloric acid, then, washed with water, and dried under reduced pressure, to give Polymeric fluorescent substance 5. The yielded amount was 200 mg. Polymeric fluorescent substance 5 contained repeating units represented by the following formulae (7) and (11) at a molar ratio of about 9:1, depending on the charging ratio of monomers.

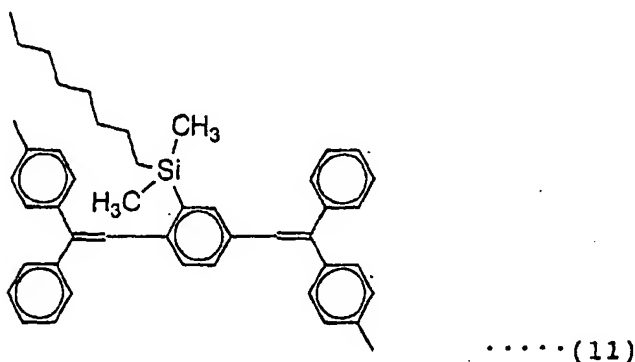

[0147] Polymeric fluorescent substance 5 had a polystyrene-reduced average molecular weight of $M_w=13,600$, $M_n=5,900$. Polymeric fluorescent substance 5 could be dissolved in a solvent such as toluene, chloroform and the like.

<Evaluation of fluorescent property>

[0148] The relative value of the fluorescent strength of Polymeric fluorescent substance 5 was obtained in the same manner as in Example 1.

[0149] Polymeric fluorescent substance 5 had a fluorescent peak wave-length of 486 nm and showed a relative value of the fluorescent strength of 3.5.

<Production and evaluation of the device>


[0150] Polymer LED was fabricated in the same manner as in Example 1 except for using polymeric fluorescent substance 5 in place of polymeric fluorescent substance 1. Voltage was applied on the resulted device, to give EL light emission from Polymeric fluorescent substance 5. The strength of EL light emission was approximately in proportion to the current density.

Example 6


<Synthesis of Polymeric fluorescent substance 6>

[0151] Under an inert atmosphere, 9,9-dioctylfluorene-2,7-bis(ethylene boronate) (314 mg, 0.59 mmol), 9,10-bis(2-(4-bromophenyl)-2-phenyl-ethenyl)-anthracene (390 mg, 0.56 mmol) and aliquat® 336 (manufactured by Aldrich,

220 mg, 0.55 mmol) were dissolved in toluene (10 ml) and to this was added 10 ml of an aqueous solution of potassium carbonate (290 mg, 2.1 mmol). Further, tetrakis(triphenylphosphine)palladium (21 mg, 0.018 mmol) was added, and the mixture was heated under reflux for 20 hours. After cooling, the organic layer was added dropwise into methanol, and the deposited precipitate was filtrated off. This was dissolved in toluene (100 ml), and washed with 3% oxalic acid water, then, water, and the organic layer was distilled off under reduced pressure. The residue was dissolved in toluene (20 ml) and added dropwise into methanol, and the deposited precipitate was filtrated off, to obtain Polymeric fluorescent substance 6. The yielded amount was 280 mg. Polymeric fluorescent substance 6 contained repeating units represented by the following formulae (7) and (12), bonded alternately, at a molar ratio of about 1:1, depending on the charging ratio of monomers.



..... (7)

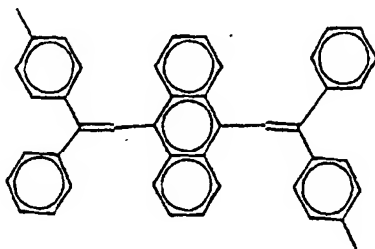

..... (12)

[0152] Polymeric fluorescent substance 6 had a polystyrene-reduced average molecular weight of $M_w=22,000$, $M_n=8,800$. Polymeric fluorescent substance 6 could be dissolved in a solvent such as toluene, chloroform and the like.

<Evaluation of fluorescent property>



[0153] The relative value of the fluorescent strength of Polymeric fluorescent substance 6 was obtained in the same manner as in Example 1.

[0154] Polymeric fluorescent substance 6 had a fluorescent peak wave-length of 548 nm and showed a relative value of the fluorescent strength of 0.41.

Example 7

<Synthesis of Polymeric fluorescent substance 7>

[0155] Polymeric fluorescent substance 7 was obtained in the same manner as in Example 4 except that 1,4-bis(2-(4-bromophenyl)-2-phenyl-ethenyl-2-methyl-5-(3,7-dimethyloctyl)benzene was used instead of 9,10-bis(2-(4-bromophenyl)-2-phenyl-ethenyl)-anthracene. The yielded amount was 220 mg. Polymeric fluorescent substance 7 contained repeating units represented by the following formulae (7) and (13), bonded alternately, at a molar ratio of about 1:1, depending on the charging ratio of monomers.

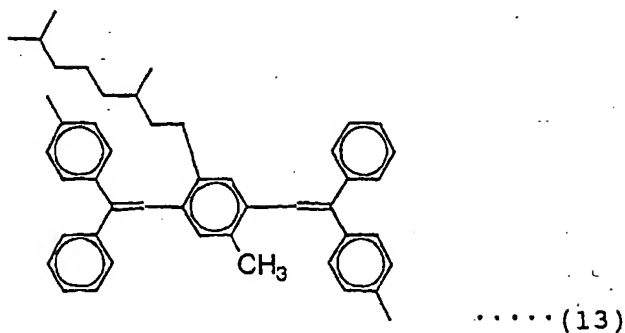

[0156] Polymeric fluorescent substance 7 had a polystyrene-reduced average molecular weight of $M_w=26,100$, $M_n=10,700$. Polymeric fluorescent substance 7 could be dissolved in a solvent such as toluene, chloroform and the like.

<Evaluation of fluorescent property>


[0157] The relative value of the fluorescent strength of Polymeric fluorescent substance 7 was obtained in the same manner as in Example 1.


[0158] Polymeric fluorescent substance 7 had a fluorescent peak wave-length of 496 nm and showed a relative value of the fluorescent strength of 2.2.

Example 8

<Synthesis of Polymeric fluorescent substance 8>

[0159] Under an inert atmosphere, 9,9-dioctylfluorene-2,7-bis(ethylene boronate) (305 mg, 0.57 mmol), 1,4-bis(2-(4-bromophenyl)-2-phenyl-ethenyl)-2-(4-(3,7-dimethyloctyloxy)-phenyl)benzene (451 mg, 0.547 mmol) and aliquat® 336 (manufactured by Aldrich, 220 mg, 0.547 mmol) were dissolved in toluene (10 ml) and to this was added 10 ml of an aqueous solution of potassium carbonate (226 mg, 1.64 mmol). Further, tetrakis(triphenylphosphine)palladium (1.3 mg, 0.001 mmol) was added, and the mixture was heated under reflux for 10 hours. After cooling, the organic layer was added dropwise into methanol, and the deposited precipitate was filtrated off, to obtain Polymeric fluorescent substance 8. The yielded amount was 280 mg. Polymeric fluorescent substance 8 contained repeating units represented by the following formulae (7) and (14), bonded alternately, at a molar ratio of about 1:1, depending on the charging ratio of monomers.



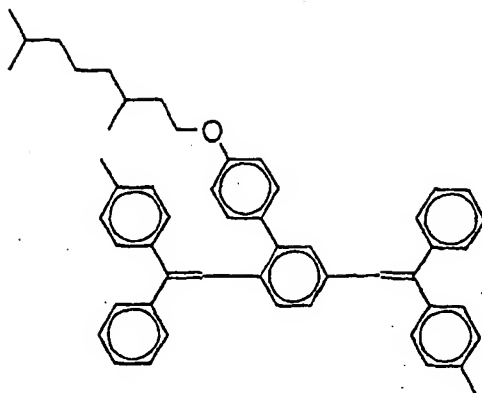

..... (14)

<Evaluation of fluorescent property>

[0160] The relative value of the fluorescent strength of Polymeric fluorescent substance 8 was obtained in the same manner as in Example 1.

[0161] Polymeric fluorescent substance 8 had a fluorescent peak wave-length of 473 nm and showed a relative value of the fluorescent strength of 2.2.


Comparative Example 1

<Synthesis of 1,4-bis(2-(4-bromophenyl)ethenyl)-4'-(3,7-dimethyloctyloxy)biphenyl>


[0162] Under an inert atmosphere, 4-bromobenzaldehyde (2.18 g, 11.8 mmol), 2,5'-bis-(diethylmethyl phosphonate)-4'-(3,7-dimethyloctyloxy)biphenyl (3.0 g, 5.0 mmol) and tert-butoxypotassium (2.0 g, 1.76 mmol) were added to and dissolved in tetrahydrofuran (30 g), and the solution was stirred for 3 hours. The solvent was distilled off, and the residue was dissolved in toluene (200 ml), and hydrochloric acid water (200 ml) was added. After liquid separation, the aqueous layer was extracted with toluene (100 ml). The organic layer was combined with this and was with water twice, then, filtrated through Celite®(manufactured by Aldrich). The organic layer was dried over molecular sieves, then, the solvent was distilled off. The resulted crude product was purified by silica gel column chromatography (hexane/toluene), to obtain the intended substance. The yielded amount was 1.36 g, and the yield was 41%.

<Synthesis of Polymeric fluorescent substance 8>

[0163] Under an inert atmosphere, 9,9-dioctylfluorene-2,7-bis(ethylene boronate) (185 mg, 0.35 mmol), 1,4-bis(2-(4-bromophenyl)ethenyl)-4'-(3,7-dimethyloctyloxy) biphenyl (223 mg, 0.33 mmol) and aliquat® 336 (manufactured by Aldrich, 17 mg, 0.042 mmol) were dissolved in toluene (2.7 g) and to this was added 8 ml of an aqueous solution of potassium carbonate (1.13 g, 8.1 mmol). Further, tetrakis(triphenylphosphine)palladium (2 mg, 0.0017 mmol) was added, and the mixture was heated under reflux for 10 hours. After cooling, the organic layer was added dropwise into methanol/water (1/1). The supernatant was discarded, and methanol was added to the residue and suspended. The precipitate was filtrated off, to obtain Polymeric fluorescent substance 9. The yielded amount was 290 mg. Polymeric fluorescent substance 9 contained repeating units represented by the following formulae (7) and (15), bonded alternately, at a molar ratio of about 1:1, depending on the charging ratio of monomers.



..... (7)

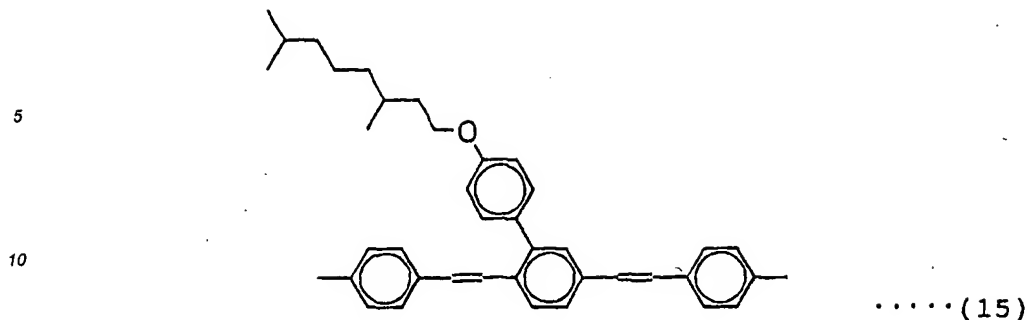

15 <Evaluation of fluorescent property>

[0164] The relative value of the fluorescent strength of Polymeric fluorescent substance 9 was obtained in the same manner as in Example 1.

20 [0165] Polymeric fluorescent substance 9 had a fluorescent peak wave-length of 468 nm and showed a relative value of the fluorescent strength of 0.27.


[0166] The polymeric fluorescent substance of the present invention contains an arylenevinylene structure and a fluorene structure, shows strong fluorescence, and can be suitably used as a polymer LED or a pigment for laser. The polyfluorene-based polymeric fluorescent substance of the present invention can also be used as an organic solar battery material, organic semiconductor for organic transistor, and conductive thin film material. Further, a polymer LED using this polymeric fluorescent substance is a polymer LED of high performance which can be driven at lower voltage with high efficiency. Therefore, this polymer LED can be preferably used as a back light of a liquid crystal display, a light source in the form of curved surface or flat surface for illumination, or a display device of segment type, and in apparatuses such as a flat panel display of dot matrix, and the like.

30

Claims

1. A polymeric fluorescent substance manifesting fluorescence in the solid state, having a polystyrene-reduced number-average molecular weight of 10^3 to 10^8 , and comprising one or more segments of formula (1):


35



40


wherein Ar_1 and Ar_2 each independently represent an arylene group or a divalent heterocyclic compound group; R_2 and R_3 each independently represent a group selected from hydrogen atom, alkyl groups, aryl groups, heterocyclic compound groups and cyano group; R_1 and R_4 each independently represent a group selected from alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, arylalkenyl groups, arylalkynyl groups, monovalent heterocyclic compound groups and cyano group; a and c each independently represent an integer of 0 to 4, and b represents an integer of 1 or more; when b is 1, a and c do not represent 0 simultaneously; when b is 2, at least one of groups R_2 and R_3 represents a group other than a hydrogen atom and cyano group; when b is 3 or more, a and c do not represent 0 simultaneously if both of R_2 and R_3 are a hydrogen atom; when a is 2 or more, a plurality of R_1 s may be the same or different; when c is 2 or more, a plurality of R_4 s may be the same or different; R_1 to R_4 may be connected to form a ring; and when R_1 to R_4 are a group containing an alkyl chain, one or more of a methyl group, methylene group and methine group constituting this alkyl chain may be substituted with a group containing a hetero atom; and one or more repeating units of formula (2):

55

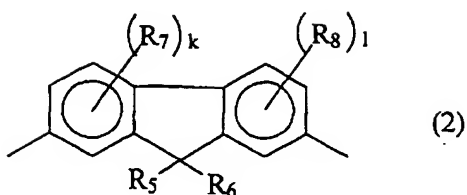


wherein R_5 and R_6 each independently represent a group selected from hydrogen atom, alkyl groups, aryl groups and monovalent heterocyclic compound groups; R_7 and R_8 each independently represent a group selected from alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, monovalent heterocyclic compound groups and cyano group; k and l each independently represent an integer of 0 to 3; when k is 2 or more, a plurality of R_7 s may be the same or different; when l is 2 or more, a plurality of R_8 s may be the same or different; two or more of R_5 to R_8 may be mutually connected to form a ring; and when R_5 to R_8 are a group containing an alkyl chain, this alkyl chain may be interrupted with a group containing a hetero atom.

2. A polymeric fluorescent substance manifesting fluorescence in the solid state, having a polystyrene-reduced number-average molecular weight of 10^3 to 10^8 , and comprising one or more repeating units of formula (2) as defined in claim 1 and one or more repeating units of formula (3):




wherein Ar_3 and Ar_4 each independently represent an arylene group or a divalent heterocyclic compound group; R_{10} and R_{11} each independently represent a group selected from hydrogen atom, alkyl groups, aryl groups, monovalent heterocyclic compound groups and cyano group; R_9 and R_{12} each independently represent a group selected from alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, arylalkenyl groups, arylalkynyl groups, heterocyclic compound groups and cyano group; m and n each independently represent an integer of 0 to 4; m and n do not represent 0 simultaneously; when m is 2 or more, a plurality of R_9 s may be the same or different; when n is 2 or more, a plurality of R_{12} s may be the same or different; R_9 to R_{12} may be connected to form a ring; and when R_9 to R_{12} are a group containing an alkyl chain, one or more of a methyl group, methylene group and methine group constituting this alkyl chain may be substituted with a group containing a hetero atom.

3. A substance according to claim 2 wherein the total amount of repeating units of formulae (2) and (3) is 50 mol% or more based on the total amount of all repeating units, and the total amount of repeating units of formula (3) is 0.1 mol% or more and 50 mol% or less based on the total amount of the repeating units of formulae (2) and (3).
4. A substance according to claim 2 or 3 wherein the group of formula (3) is a group of formula (4):

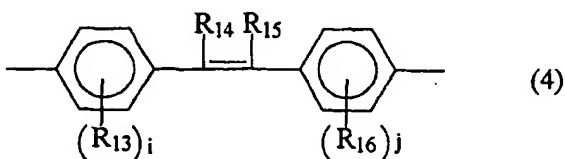


wherein R_{14} and R_{15} each independently represent a group selected from hydrogen atom, alkyl groups, aryl groups, heterocyclic compound groups and cyano group; R_{13} and R_{16} each independently represent a group selected from alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, monovalent heterocyclic compound groups and cyano group; i and j each independently represent an integer of 0 to 4; i and j do not represent 0 simultaneously; when i is 2 or more, a plurality of R_{13} s may be the same or different; when j is 2 or more, a plurality of R_{16} s may be the same or different; and R_{13} to R_{16} may be connected to form a ring.

5. A polymeric fluorescent substance manifesting fluorescence in the solid state, having a polystyrene-reduced number-average molecular weight of 10^3 to 10^8 , and comprising one or more repeating units of formula (2) as defined in claim 1 and one or more repeating units of formula (5):



wherein Ar_5 , Ar_6 and Ar_7 each independently represent an arylene group or a divalent heterocyclic compound group; R_{17} and R_{20} each independently represent a group selected from hydrogen atom, alkyl groups, aryl groups, monovalent heterocyclic compound groups and cyano group; one or more of R_{17} and R_{20} represent a group other than a hydrogen atom and cyano group; two or more of R_{17} to R_{20} may be mutually connected to form a ring; and when R_{17} to R_{20} are a group containing an alkyl chain, this alkyl chain may be interrupted with a group containing a hetero atom.

6. A substance according to claim 5 wherein the total amount of repeating units of formulae (2) and (5) is 50 mol% or more based on the total amount of all repeating units, and the total amount of repeating units of formula (5) is 0.1 mol% or more and 50 mol% or less based on the total amount of the repeating units of formulae (2) and (5).
7. A substance according to claim 5 or 6 wherein the group of formula (5) is a group of formula (6):

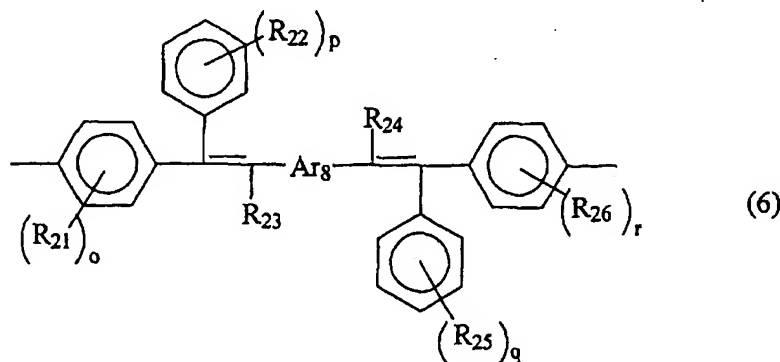


wherein Ar_8 represents an arylene group or a divalent heterocyclic compound group; R_{23} and R_{24} each independently represent a group selected from hydrogen atom, alkyl groups, aryl groups, monovalent heterocyclic compound groups and cyano group; R_{21} , R_{22} , R_{25} and R_{26} each independently represent a group selected from alkyl groups, alkoxy groups, alkylthio groups, alkylsilyl groups, alkylamino groups, aryl groups, aryloxy groups, arylsilyl groups, arylamino groups, arylalkyl groups, arylalkoxy groups, arylalkylsilyl groups, arylalkylamino groups, monovalent heterocyclic compound groups and cyano group; o and r each independently represent an integer of 0 to 4, and p and q each independently represent an integer of 0 to 5; when o is 2 or more, a plurality of R_{21} s may be the same or different; when p is 2 or more, a plurality of R_{22} s may be the same or different; when q is 2 or more, a plurality of R_{25} s may be the same or different; when r is 2 or more, a plurality of R_{26} s may be the same or different;


two or more of R_{21} to R_{26} may be mutually connected to form a ring; and when R_{21} to R_{26} are a group containing an alkyl chain, this alkyl group may be interrupted with a group containing a hetero atom.

8. A polymer light emitting device comprising at least a light emitting layer between a pair of electrodes composed of an anode and a cathode at least one of which is transparent or semi-transparent wherein the light emitting layer comprises a polymeric fluorescent substance according to any one of claims 1 to 7.
9. A device according to claim 8, further comprising a layer comprising a conducting polymer disposed between one electrode and the light emitting layer such that the layer containing a conducting polymer is adjacent to said electrode.
10. A device according to claim 8 or 9, further comprising an insulation layer having a thickness of 2 nm or less disposed between one electrode and the light emitting layer such that the insulation layer is adjacent to said electrode.
11. A device according to any one of claims 8 to 10, further comprising a layer comprising an electron transporting compound disposed between the cathode and the light emitting layer such that the layer comprising an electron transporting compound is adjacent to said light emitting layer.
12. A device according to any one of claims 8 to 11, further comprising layer comprising a hole transporting compound disposed between the anode and the light emitting layer such that the layer comprising a hole transporting compound is adjacent to said light emitting layer.
13. A device according to any one of claims 8 to 10, further comprising a layer comprising an electron transporting compound and a layer comprising a hole transporting compound disposed between the cathode and the light emitting layer such that the layer comprising an electron transporting compound is adjacent to said light emitting layer, and the layer comprising a hole transporting compound is adjacent to said light emitting layer.
14. A flat light source comprising a polymer light emitting device according to any one of claims 8 to 13.
15. A segment display comprising a polymer light emitting device according to any one of claims 8 to 13.
16. A dot matrix display comprising a polymer light emitting device according to any one of claims 8 to 13.
17. A liquid crystal display comprising a polymer light emitting device according to any one of claims 8 to 13 as a back-light.

Patentansprüche


1. Polymere fluoreszierende Substanz, die Fluoreszenz im festen Zustand zeigt, einen auf Polystyrol bezogenen Zahlenmittelwert des Molekulargewichts von 10^3 bis 10^8 besitzt und ein oder mehrere Segmente der Formel (1):



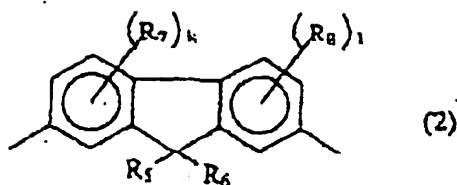


worin R_5 und R_6 unabhängig voneinander je eine Gruppe darstellen, die aus einem Wasserstoffatom, Alkylgruppen, Arylgruppen und einwertigen Gruppen heterocyclischer Verbindungen ausgewählt ist; R_7 und R_8 unabhängig voneinander je eine Gruppe darstellen, die aus Alkylgruppen, Alkoxygruppen, Alkylthiogruppen, Alkylsilylgruppen, Alkylaminogruppen, Arylgruppen, Aryloxygruppen, Arylsilylgruppen, Arylaminogruppen, Arylalkylgruppen, Arylalkoxygruppen, Arylalkylsilylgruppen, Arylalkylaminogruppen, einwertigen Gruppen heterocyclischer Verbindungen und einer Cyanogruppe ausgewählt sind; k und l unabhängig voneinander je eine ganze Zahl von 0 bis 3 darstellen; mehrere R_7 gleich oder verschieden sein können, wenn $k \geq 2$; mehrere R_8 gleich oder verschieden sein können, wenn $l \geq 2$; zwei oder mehr der Gruppen R_5 bis R_8 miteinander zu einem Ring verbunden sein können; und wenn R_5 bis R_8 eine Gruppe sind, die eine Alkylkette enthält, diese Alkylkette durch eine ein Heteroatom enthaltende Gruppe unterbrochen sein kann.

2. Polymere fluoreszierende Substanz, die Fluoreszenz im festen Zustand zeigt, einen auf Polystyrol bezogenen Zahlenmittelwert des Molekulargewichts von 10^3 bis 10^8 besitzt und ein oder mehrere sich wiederholende Einheiten der Formel (2), wie in Anspruch 1 definiert, sowie ein oder mehrere sich wiederholende Einheiten der Formel (3) umfasst:




worin Ar_3 und Ar_4 unabhängig voneinander je eine Arylengruppe oder eine zweiwertige Gruppe einer heterocyclischen Verbindung darstellen; R_{10} und R_{11} unabhängig voneinander je eine Gruppe darstellen, die aus einem Wasserstoffatom, Alkylgruppen, Arylgruppen, einwertigen Gruppen heterocyclischer Verbindungen und einer Cyanogruppe ausgewählt ist; R_9 und R_{12} unabhängig voneinander je eine Gruppe darstellen, die aus Alkylgruppen, Alkoxygruppen, Alkylthiogruppen, Alkylsilylgruppen, Alkylaminogruppen, Arylgruppen, Aryloxygruppen, Arylsilylgruppen, Arylaminogruppen, Arylalkylgruppen, Arylalkoxygruppen, Arylalkylsilylgruppen, Arylalkylaminogruppen, Arylalkenylgruppen, Arylalkinylgruppen, Gruppen einer heterocyclischen Verbindung und einer Cyanogruppe ausgewählt ist; m und n unabhängig voneinander je eine ganze Zahl von 0 bis 4 darstellen; m und n nicht gleichzeitig 0 darstellen; mehrere R_9 gleich oder verschieden sein können, wenn $m \geq 2$; mehrere R_{12} gleich oder verschieden sein können, wenn $n \geq 2$; R_9 bis R_{12} zu einem Ring verbunden sein können; und wenn R_9 bis R_{12} eine Gruppe sind, die eine Alkylkette enthält, ein oder mehrere einer Methylgruppe, einer Methylengruppe und einer Methin-Gruppe, aus denen diese Alkylkette besteht, mit einer ein Heteroatom enthaltenden Gruppe substituiert sein können.

3. Substanz nach Anspruch 2, dadurch gekennzeichnet, dass bezogen auf die Gesamtmenge aller sich wiederholenden Einheiten die Gesamtmenge der sich wiederholenden Einheiten der Formeln (2) und (3) 50 Mol-% oder mehr beträgt, während bezogen auf die Gesamtmenge der sich wiederholenden Einheiten der Formeln (2) und (3) die Gesamtmenge der sich wiederholenden Einheiten der Formel (3) 0,1 Mol-% oder mehr und 50 Mol-% oder weniger beträgt.
4. Substanz nach Anspruch 2 oder 3, dadurch gekennzeichnet, dass die Gruppe der Formel (3) eine Gruppe der Formel (4) ist:

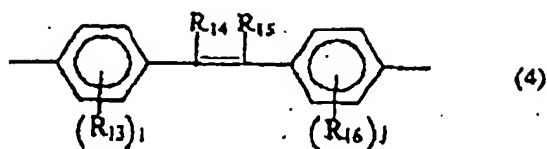


worin R_{14} und R_{15} unabhängig voneinander je eine Gruppe darstellen, die aus einem Wasserstoffatom, Alkylgruppen, Arylgruppen, Gruppen heterocyclischer Verbindungen und einer Cyanogruppe ausgewählt ist; R_{13} und R_{16} unabhängig voneinander je eine Gruppe darstellen, die aus Alkylgruppen, Alkoxygruppen, Alkylthiogruppen, Alkylsilylgruppen, Alkylaminogruppen, Arylgruppen, Aryloxygruppen, Arylsilylgruppen, Arylaminogruppen, Arylalkylgruppen, Arylalkoxygruppen, Arylalkylsilylgruppen, Arylalkylaminogruppen, einwertigen Gruppen heterocyclischer Verbindungen und einer Cyanogruppe ausgewählt ist; i und j unabhängig voneinander je eine ganze Zahl von 0 bis 4 darstellen; i und j nicht gleichzeitig 0 sind; mehrere R_{13} gleich oder verschieden sein können, wenn $i \geq 2$; mehrere R_{16} gleich oder verschieden sein können, wenn $j \geq 2$; und R_{13} bis R_{16} zu einem Ring verbunden sein können.

5. Polymere fluoreszierende Substanz, die Fluoreszenz im festen Zustand zeigt, einen auf Polystyrol bezogenen Zahlenmittelwert des Molekulargewichts von 10^3 bis 10^8 besitzt und ein oder mehrere sich wiederholende Einheiten der Formel (2), wie in Anspruch 1 definiert, sowie ein oder mehrere sich wiederholende Einheiten der Formel (5) umfasst:



worin Ar_5 , Ar_6 und Ar_7 unabhängig voneinander je eine Arylengruppe oder eine zweiwertige Gruppe einer heterocyclischen Verbindung darstellen; R_{17} und R_{20} unabhängig voneinander je eine Gruppe darstellen, die aus einem Wasserstoffatom, Alkylgruppen, Arylgruppen, einwertigen Gruppen heterocyclischer Verbindungen und einer Cyanogruppe ausgewählt ist; ein oder mehrere von R_{17} und R_{20} eine andere Gruppe als ein Wasserstoffatom und eine Cyanogruppe sind; zwei oder mehrere von R_{17} bis R_{20} miteinander zu einem Ring verbunden sein können; und wenn R_{17} bis R_{20} eine Gruppe sind, die eine Alkylkette enthält, diese Alkylkette mit einer ein Heteroatom enthaltenden Gruppe unterbrochen sein kann.

6. Substanz nach Anspruch 5, **dadurch gekennzeichnet, dass** bezogen auf die Gesamtmenge aller sich wiederholenden Einheiten die Gesamtmenge der sich wiederholenden Einheiten der Formeln (2) und (5) 50 Mol-% oder mehr beträgt, während bezogen auf die Gesamtmenge der sich wiederholenden Einheiten der Formeln (2) und (5) die Gesamtmenge der sich wiederholenden Einheiten der Formel (5) 0,1 Mol-% oder mehr und 50 Mol-% oder weniger beträgt.
7. Substanz nach Anspruch 3 oder 6, **dadurch gekennzeichnet, dass** die Gruppe der Formel (5) eine Gruppe der Formel (6) ist:

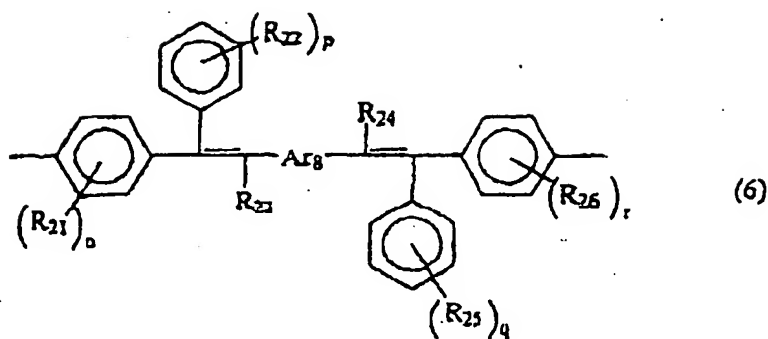


worin Ar_8 eine Arylengruppe oder eine zweiwertige Gruppe einer heterocyclischen Verbindung darstellt; R_{23} und R_{24} unabhängig voneinander je eine Gruppe darstellen, die aus einem Wasserstoffatom, Alkylgruppen, Arylgruppen, einwertigen Gruppen heterocyclischer Verbindungen und einer Cyanogruppe ausgewählt ist; R_{21} , R_{22} , R_{25} und R_{26} unabhängig voneinander je eine Gruppe darstellen, die aus Alkylgruppen, Alkoxygruppen, Alkylthiogruppen, Alkylsilylgruppen, Alkylaminogruppen, Arylgruppen, Aryloxygruppen, Arylsilylgruppen, Arylaminogruppen, Arylalkylgruppen, Arylalkoxygruppen, Arylalkylsilylgruppen, Arylalkylaminogruppen, einwertigen Gruppen heterocyclischer Verbindungen und einer Cyanogruppe ausgewählt ist; o und r unabhängig voneinander je eine ganze Zahl von 0 bis 4 darstellen; p und q unabhängig voneinander je eine ganze Zahl von 0 bis 5 darstellen; mehrere R_{21} gleich oder verschieden sein können, wenn $o \geq 2$; mehrere R_{22} gleich oder verschieden sein können, wenn $p \geq 2$; mehrere R_{25} gleich oder verschieden sein können, wenn $q \geq 2$; mehrere R_{26} gleich oder verschieden sein können, wenn $r \geq 2$; zwei oder mehrere von R_{21} bis R_{26} miteinander zu einem Ring verbunden sein können; und wenn R_{21} bis R_{26} eine Gruppe sind, die eine Alkylkette enthält, diese Alkylgruppe durch eine ein Heteroatom enthaltende Gruppe unterbrochen sein kann.

8. Licht emittierende Polymer-Vorrichtung, zumindest eine Licht emittierende Schicht zwischen einem Paar von Elektroden umfassend, das aus einer Anode und einer Kathode besteht, von denen zumindest eine durchsichtig oder halbdurchsichtig ist, dadurch gekennzeichnet, dass die Licht emittierende Schicht eine polymere fluoreszierende Substanz nach einem der Ansprüche 1 bis 7 umfasst.
9. Vorrichtung nach Anspruch 8, weiter eine Schicht umfassend, die ein leitendes Polymer umfasst, das so zwischen einer Elektrode und der Licht emittierenden Schicht angeordnet ist, dass die ein leitendes Polymer enthaltende Schicht an diese Elektrode angrenzt.
10. Vorrichtung nach Anspruch 8 oder 9, weiter eine isolierende Schicht umfassend, die eine Dicke von 2 nm oder weniger besitzt und so zwischen einer Elektrode und der Licht emittierenden Schicht angeordnet ist, dass die isolierende Schicht an diese Elektrode angrenzt.
11. Vorrichtung nach einem der Ansprüche 8 bis 10, weiter eine Schicht umfassend, die eine Elektronen transportierende Verbindung umfasst und so zwischen der Kathode und der Licht emittierenden Schicht angeordnet ist, dass die eine Elektronen transportierende Verbindung umfassende Schicht an diese Licht emittierende Schicht angrenzt.
12. Vorrichtung nach einem der Ansprüche 8 bis 11, weiter eine Schicht umfassend, die eine Löcher transportierende Verbindung umfasst und so zwischen der Anode und der Licht emittierenden Schicht angeordnet ist, dass die eine Löcher transportierende Verbindung umfassende Schicht an diese Licht emittierende Schicht angrenzt.
13. Vorrichtung nach einem der Ansprüche 8 bis 10, weiter eine eine Elektronen transportierende Verbindung enthaltende Schicht und eine eine Löcher transportierende Verbindung enthaltende Schicht umfassend, die so zwischen der Kathode und der Licht emittierenden Schicht angeordnet sind, dass die eine Elektronen transportierende Verbindung umfassende Schicht an diese Licht emittierende Schicht angrenzt und die eine Löcher transportierende Verbindung umfassende Schicht an diese Licht emittierende Schicht angrenzt.
14. Flache Lichtquelle, eine Licht emittierende Polymer-Vorrichtung nach einem der Ansprüche 8 bis 13 umfassend.


15. Segmentanzeige, eine Licht emittierende Polymer-Vorrichtung nach einem der Ansprüche 8 bis 13 umfassend.
16. Punktmatrixanzeige, eine Licht emittierende Polymer-Vorrichtung nach einem der Ansprüche 8 bis 13 umfassend.
17. Flüssigkristallanzeige, eine Licht emittierende Polymer-Vorrichtung nach einem der Ansprüche 8 bis 13 als Hintergrundbeleuchtung umfassend.

Revendications

1. Substance fluorescente polymérique manifestant une fluorescence à l'état solide, présentant une masse moléculaire moyenne en nombre réduite au polystyrène de 10^3 à 10^8 , et comprenant un ou plusieurs segments de formule (1):




dans laquelle Ar_1 et Ar_2 représentent chacun indépendamment un groupe arylène ou un groupe de composé hétérocyclique divalent ; R_2 et R_3 représentent chacun indépendamment un groupe choisi parmi un atome d'hydrogène, des groupes alkyle, des groupes aryle, des groupes de composés hétérocycliques et un groupe cyano ; R_1 et R_4 représentent chacun indépendamment un groupe choisi parmi des groupes alkyle, des groupes alcoxy, des groupes alkylthio, des groupes alkylsilyle, des groupes alkylamino, des groupes aryle, des groupes aryloxy, des groupes arylsilyle, des groupes arylamino, des groupes arylalkyle, des groupes arylalcoxy, des groupes arylalkylsilyle, des groupes arylalkylamino, des groupes arylalcényle, des groupes arylalcynyle, des groupes de composés hétérocycliques monovalents et un groupe cyano ; a et c représentent chacun indépendamment un nombre entier de 0 à 4, et b représente un nombre entier de 1 ou plus ; lorsque b est égal à 1, a et c ne représentent pas 0 simultanément ; lorsque b est égal à 2, au moins l'un des groupes R_2 et R_3 représente un groupe autre qu'un atome d'hydrogène et un groupe cyano ; lorsque b est égal à 3 ou plus, a et c ne représentent pas 0 simultanément si R_2 et R_3 représentent tous les deux un atome d'hydrogène ; lorsque a est égal à 2 ou plus, plusieurs R_1 peuvent être identiques ou différents ; lorsque c est égal à 2 ou plus, plusieurs groupes R_4 peuvent être identiques ou différents ; R_1 à R_4 peuvent être reliés pour former un cycle ; et lorsque R_1 à R_4 représentent un groupe contenant une chaîne alkyle, un ou plusieurs groupes méthyle, groupes méthylène ou groupes méthine constituant cette chaîne alkyle peuvent être substitués par un groupe contenant un hétéroatome ; et un ou plusieurs motifs répétés de formule (2) :

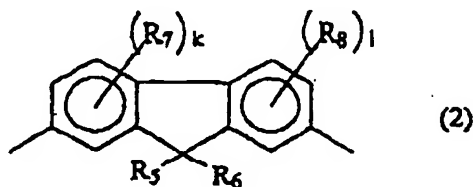

dans laquelle R_5 et R_6 représentent chacun indépendamment un groupe choisi parmi un atome d'hydrogène, des groupes alkyle, des groupes aryle et des groupes de composés hétérocycliques monovalents ; R_7 et R_8 représentent chacun indépendamment un groupe choisi parmi des groupes alkyle, des groupes alcoxy, des groupes alkylthio, des groupes alkylsilyle, des groupes alkylamino, des groupes aryle, des groupes aryloxy, des groupes arylsilyle, des groupes arylamino, des groupes arylalkyle, des groupes arylalcoxy, des groupes arylalkylsilyle, des groupes arylalkylamino, des groupes de composés hétérocycliques monovalents et un groupe cyano ; k et l représentent chacun indépendamment un nombre entier de 0 à 3 ; lorsque k est égal à 2 ou plus, plusieurs groupes R_7 peuvent être identiques ou différents ; lorsque l est égal à 2 ou plus, plusieurs groupes R_8 peuvent être identiques ou différents ; deux des groupes R_5 à R_8 ou plus peuvent être mutuellement reliés pour former un cycle ;

et lorsque R_5 à R_8 représentent un groupe contenant une chaîne alkyle, cette chaîne alkyle peut être interrompue par un groupe contenant un hétéroatome.


2. Substance fluorescente polymérique manifestant une fluorescence à l'état solide, présentant une masse moléculaire moyenne en nombre réduite au polystyrène de 10^3 à 10^8 , et comprenant un ou plusieurs motifs répétés de formule (2) telle que définie dans la revendication 1 et un ou plusieurs motifs répétés de formule (3) :



dans laquelle Ar_3 et Ar_4 représentent chacun indépendamment un groupe arylène ou un groupe de composé hétérocyclique divalent ; R_{10} et R_{11} représentent chacun indépendamment un groupe choisi parmi un atome d'hydrogène, des groupes alkyle, des groupes aryle, des groupes de composés hétérocycliques monovalents et un groupe cyano ; R_9 et R_{12} représentent chacun indépendamment un groupe choisi parmi des groupes alkyle, des groupes alcoxy, des groupes alkylthio, des groupes alkylsilyle, des groupes alkylamino, des groupes aryle, des groupes aryloxy, des groupes arylsilyle, des groupes arylamino, des groupes arylalkyle, des groupes arylalcoxy, des groupes arylalkylsilyle, des groupes arylalkylamino, des groupes arylalcényle, des groupes arylalcynyle, des groupes de composés hétérocycliques et un groupe cyano ; m et n représentent chacun indépendamment un nombre entier de 0 à 4 ; m et n ne représentent pas 0 simultanément ; lorsque m est égal à 2 ou plus, plusieurs groupes R_9 peuvent être identiques ou différents ; lorsque n est égal à 2 ou plus, plusieurs groupes R_{12} peuvent être identiques ou différents ; R_9 à R_{12} peuvent être reliés pour former un cycle ; et lorsque R_9 à R_{12} représentent un groupe contenant une chaîne alkyle, un ou plusieurs groupes méthyle, groupes méthylène ou groupes méthine constituant cette chaîne alkyle peuvent être substitués par un groupe contenant un hétéroatome.

3. Substance selon la revendication 2, dans laquelle la quantité totale des motifs répétés de formules (2) et (3) est de 50 % en moles ou plus par rapport à la quantité totale de tous les motifs répétés, et la quantité totale des motifs répétés de formule (3) est de 0,1 % en moles ou plus et de 50 % en moles ou moins par rapport à la quantité totale des motifs répétés de formules (2) et (3).


4. Substance selon la revendication 2 ou 3, dans laquelle le groupe de formule (3) est un groupe de formule (4) :

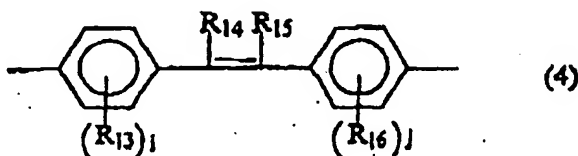

dans laquelle R_{14} et R_{15} représentent chacun indépendamment un groupe choisi parmi un atome d'hydrogène, des groupes alkyle, des groupes aryle et des groupes de composés hétérocycliques et un groupe cyano ; R_{13} et R_{16} représentent chacun indépendamment un groupe choisi parmi des groupes alkyle, des groupes alcoxy, des groupes alkylthio, des groupes alkylsilyle, des groupes alkylamino, des groupes aryle, des groupes aryloxy, des groupes arylsilyle, des groupes arylamino, des groupes arylalkyle, des groupes arylalcoxy, des groupes arylalkylsilyle, des groupes arylalkylamino, des groupes de composés hétérocycliques monovalents et un groupe cyano ; i et j représentent chacun indépendamment un nombre entier de 0 à 4 ; i et j ne représentent pas 0 simultanément ; lorsque i est égal à 2 ou plus, plusieurs groupes R_{13} peuvent être identiques ou différents ; lorsque j est égal à 2 ou plus, plusieurs groupes R_{16} peuvent être identiques ou différents ; et R_{13} à R_{16} peuvent être reliés pour former un cycle.

5. Substance fluorescente polymérique manifestant une fluorescence à l'état solide, présentant une masse moléculaire moyenne en nombre réduite au polystyrène de 10^3 à 10^8 , et comprenant un ou plusieurs motifs répétés de


formule (2) telle que définie dans la revendication 1 et un ou plusieurs motifs répétés de formule (5) :



dans laquelle Ar_5 , Ar_6 et Ar_7 représentent chacun indépendamment un groupe arylène ou un groupe de composé hétérocyclique divalent ; R_{17} et R_{20} représentent chacun indépendamment un groupe choisi parmi un atome d'hydrogène, des groupes alkyle, des groupes aryle, des groupes de composés hétérocycliques monovalents et un groupe cyano ; un ou plusieurs des groupes R_{17} et R_{20} représentent un groupe autre qu'un atome d'hydrogène et un groupe cyano ; deux des groupes R_{17} à R_{20} ou plus peuvent être mutuellement reliés pour former un cycle ; et lorsque R_{17} à R_{20} représentent un groupe contenant une chaîne alkyle, cette chaîne alkyle peut être interrompue par un groupe contenant un hétéroatome.

6. Substance selon la revendication 5, dans laquelle la quantité totale des motifs répétés de formules (2) et (5) est de 50 % en moles ou plus par rapport à la quantité totale de tous les motifs répétés, et la quantité totale des motifs répétés de formule (5) est de 0,1 % en moles ou plus et de 50 % en moles ou moins par rapport à la quantité totale des motifs répétés de formules (2) et (5).

7. Substance selon la revendication 5 ou 6, dans laquelle le groupe de formule (5) est un groupe de formule (6) :

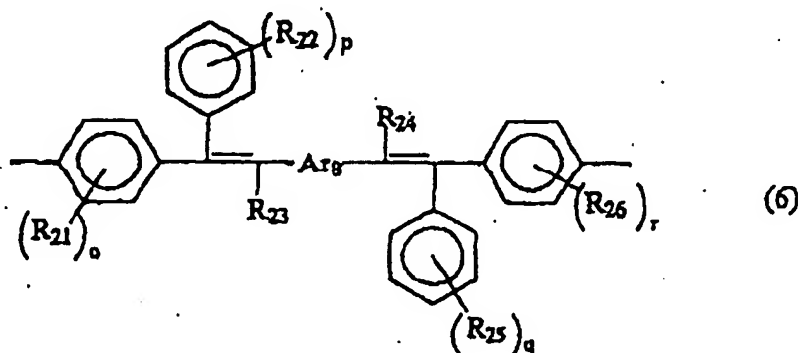

dans laquelle Ar_8 représente un groupe arylène ou un groupe de composé hétérocyclique divalent ; R_{23} et R_{24} représentent chacun indépendamment un groupe choisi parmi un atome d'hydrogène, des groupes alkyle, des groupes aryle, des groupes de composés hétérocycliques monovalents et un groupe cyano ; R_{21} , R_{23} , R_{25} et R_{26} représentent chacun indépendamment un groupe choisi parmi des groupes alkyle, des groupes alcoxy, des groupes alkylthio, des groupes alkylsilyle, des groupes alkylamino, des groupes aryle, des groupes aryloxy, des groupes arylsilyle, des groupes arylamino, des groupes arylalkyle, des groupes arylalcoxy, des groupes arylalkylsilyle, des groupes arylalkylamino, des groupes de composés hétérocycliques monovalents et un groupe cyano ; o et r représentent chacun indépendamment un nombre entier de 0 à 5 ; lorsque o est égal à 2 ou plus, plusieurs groupes R_{21} peuvent être identiques ou différents ; lorsque p est égal à 2 ou plus, plusieurs groupes R_{22} peuvent être identiques ou différents ; lorsque q est égal à 2 ou plus, plusieurs groupes R_{25} peuvent être identiques ou différents ; lorsque r est égal à 2 ou plus, plusieurs groupes R_{26} peuvent être identiques ou différents ; deux des groupes R_{21} à R_{26} peuvent être mutuellement reliés pour former un cycle ; et lorsque R_{21} à R_{26} représentent un groupe contenant une chaîne alkyle, ce groupe alkyle peut être interrompu par un groupe contenant un hétéroatome.

8. Dispositif polymère émettant de la lumière comprenant au moins une couche émettant de la lumière entre deux électrodes composées d'une anode et d'une cathode dont au moins l'une est transparente ou semi-transparente, dans lequel la couche émettant de la lumière comprend une substance fluorescente polymérique selon l'une quelconque des revendications 1 à 7.

9. Dispositif selon la revendication 8, comprenant en outre une couche comprenant un polymère conducteur placée entre une électrode et la couche émettant de la lumière de telle sorte que la couche comprenant un polymère conducteur soit adjacente à ladite électrode.
10. Dispositif selon la revendication 8 ou 9, comprenant en outre une couche isolante présentant une épaisseur de 2 nm ou moins placée entre une électrode et la couche émettant de la lumière de telle sorte que la couche isolante soit adjacente à ladite électrode.
11. Dispositif selon l'une quelconque des revendications 8 à 10, comprenant en outre une couche comprenant un composé transportant des électrons placée entre la cathode et la couche émettant de la lumière de telle sorte que la couche comprenant un composé transportant des électrons soit adjacente à ladite couche émettant de la lumière.
12. Dispositif selon l'une quelconque des revendications 8 à 11, comprenant en outre une couche comprenant un composé transportant des trous placée entre l'anode et la couche émettant de la lumière de telle sorte que la couche comprenant un composé transportant des trous soit adjacente à ladite couche émettant de la lumière.
13. Dispositif selon l'une quelconque des revendications 8 à 10, comprenant en outre une couche comprenant un composé transportant des électrons et une couche comprenant un composé transportant des trous placées entre la cathode et la couche émettant de la lumière de telle sorte que la couche comprenant un composé transportant des électrons soit adjacente à ladite couche émettant de la lumière et que la couche comprenant un composé transportant des trous soit adjacente à ladite couche émettant de la lumière.
14. Source de lumière plate comprenant un dispositif polymère émettant de la lumière selon l'une quelconque des revendications 8 à 13.
15. Affichage à segments comprenant un dispositif polymère émettant de la lumière selon l'une quelconque des revendications 8 à 13.
16. Affichage par matrice de points comprenant un dispositif polymère émettant de la lumière selon l'une quelconque des revendications 8 à 13.
17. Affichage à cristaux liquides comprenant un dispositif polymère émettant de la lumière selon l'une quelconque des revendications 8 à 13 comme éclairage de fond.